



MMBT3904

NPN SILICON TRANSISTOR




FEATURES

*Collector-Emitter Voltage: $V_{CEO}=40V$.

*Complementary to MMBT3906.

MARKING

Type Code: Marking: 1AM



ABSOLUTE MAXIMUM RATINGS (TC=25°C, unless otherwise specified)

SYMBOL	PARAMETER	VALUE	UNIT
V_{CBO}	Collector-base voltage	60	V
V_{CEO}	Collector-emitter voltage	40	V
V_{EBO}	Emitter-base voltage	6	V
I_C	Collector current	200	mA
P_C	Collector Power Dissipation	200	mW
T_j	Junction Temperature	150	°C
T_{stg}	Storage Temperature	-55~150	°C
$ROJA$	Thermal Resistance From Junction To Ambient	625	°C/W

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

ELECTRICAL CHARACTERISTICS (Tc=25°C, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	MAX	UNIT
Collector-base breakdown voltage	$V_{(BR)CBO}$	$I_C=100\mu A, I_E=0$	60		V
Collector-emitter breakdown voltage	$V_{(BR)CEO}$	$I_C=1mA, I_B=0$	40		V
Emitter-base breakdown voltage	$V_{(BR)EBO}$	$I_E=100\mu A, I_C=0$	6		V
Collector cutoff current	I_{CEX}	$V_{CB}=30V, I_E=0$		50	nA
Collector cut-off current	I_{CBO}	$V_{CE}=60V, I_B=0$		100	nA
Emitter cut-off current	I_{EBO}	$V_{EB}=5V, I_C=0$		100	nA
DC Current Gain (CLASSIFICATION OF h_{FE1})	h_{FE1}	$V_{CE}=1V, I_C=10mA$	100	200	
			200	300	
	h_{FE2}	$V_{CE}=1V, I_C=50mA$	60		
	h_{FE2}	$V_{CE}=1V, I_C=100mA$	30		
Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_C=50mA, I_B=5mA$		0.3	V
Base-Emitter Saturation Voltage	$V_{BE(sat)}$	$I_C=50mA, I_B=5mA$		0.95	V
Transition frequency	f_T	$V_{CE}=20V, I_C=10mA, f=100MHz$	300		MHz







MMBT3904

NPN SILICON TRANSISTOR

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	MAX	UNIT
Delay time	t_d	$V_{CC}=3V, V_{BE(off)}=-0.5V, I_C=10mA, I_{B1}=1mA$		35	ns
Rise time	t_r	$V_{CC}=3V, V_{BE(off)}=-0.5V, I_C=10mA, I_{B1}=1mA$		35	ns
Storage time	t_s	$V_{CC}=3V, I_C=10mA, I_{B1}=I_{B2}=1mA$		200	ns
Fall time	t_f	$V_{CC}=3V, I_C=10mA, I_{B1}=I_{B2}=1mA$		50	ns

TYPICAL CHARACTERISTICS

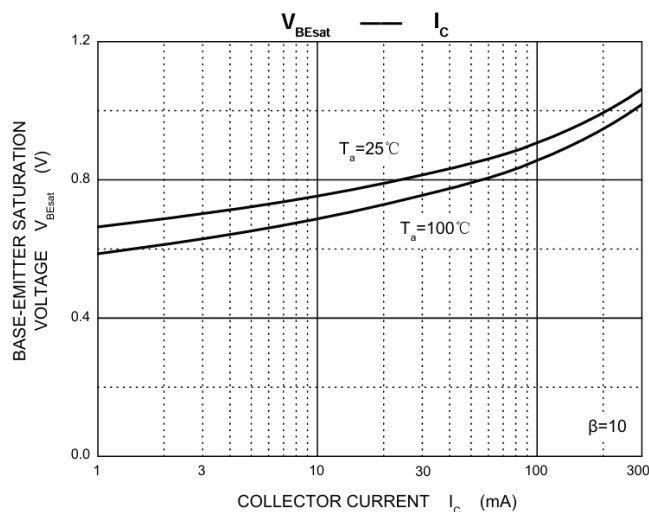
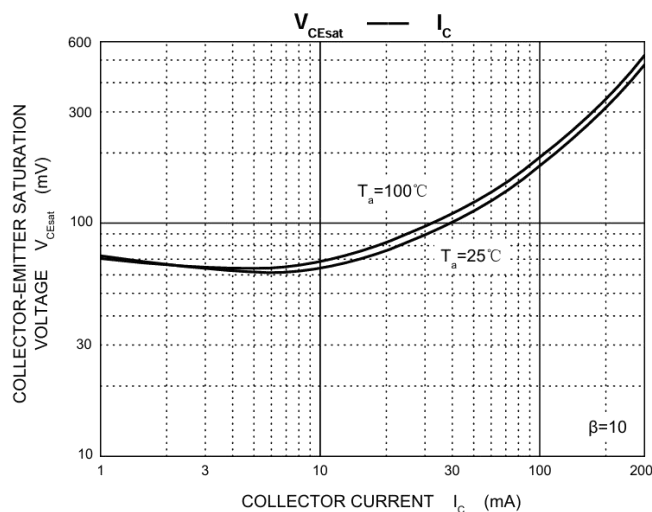
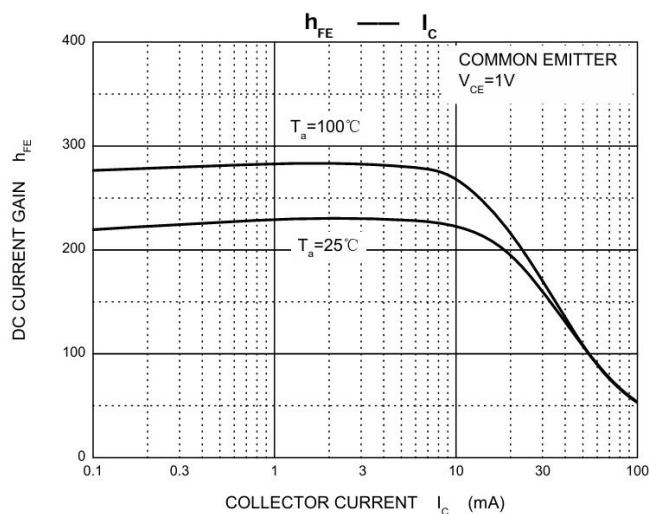
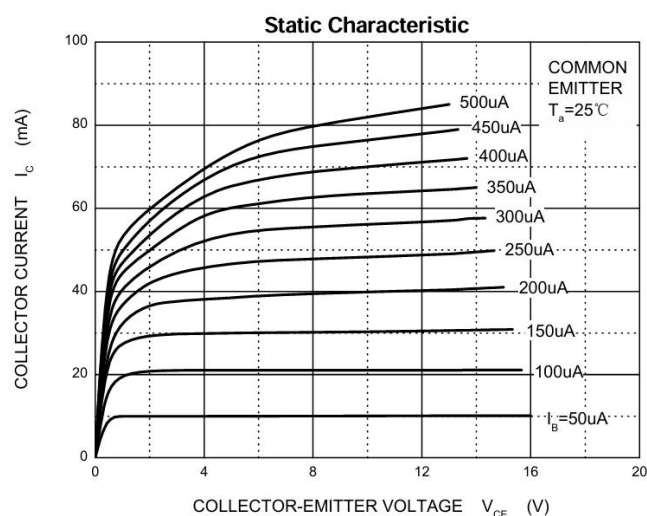




MMBT3904

NPN SILICON TRANSISTOR

■ TYPICAL CHARACTERISTICS(Con.t)

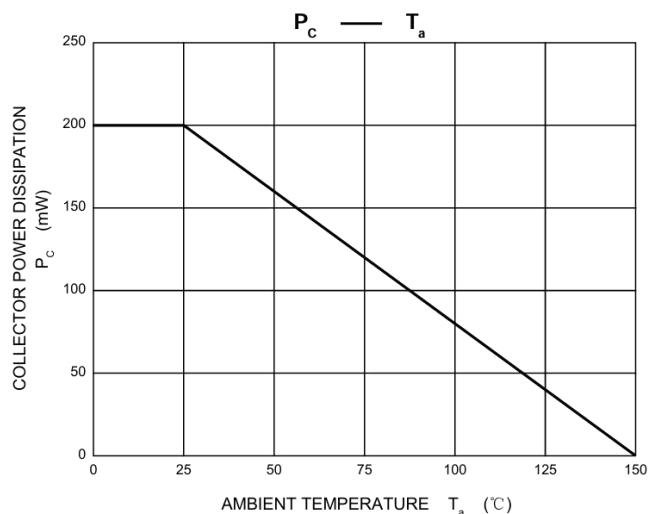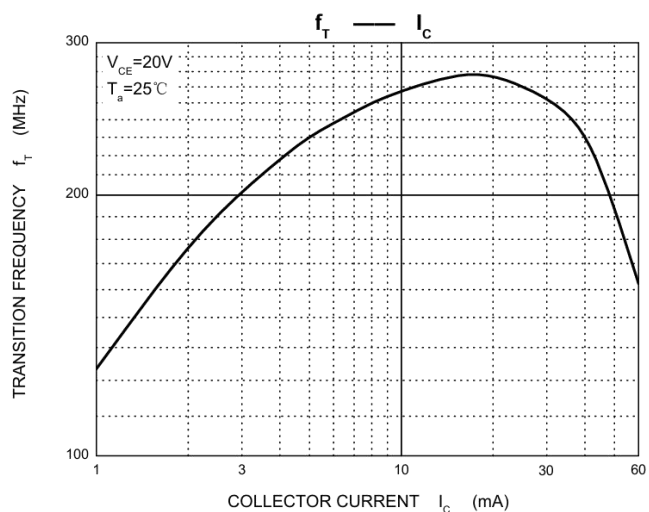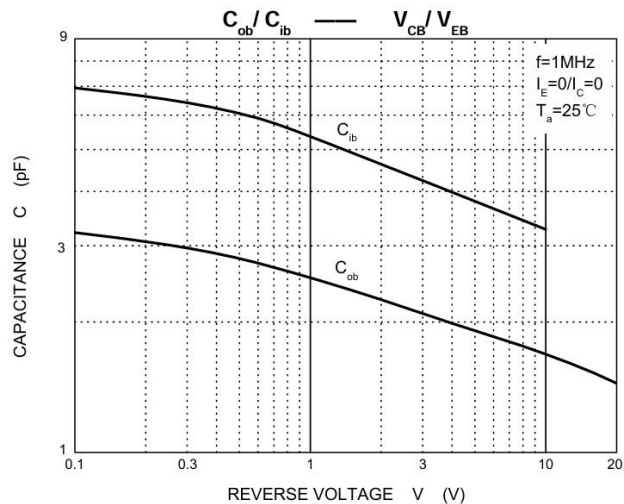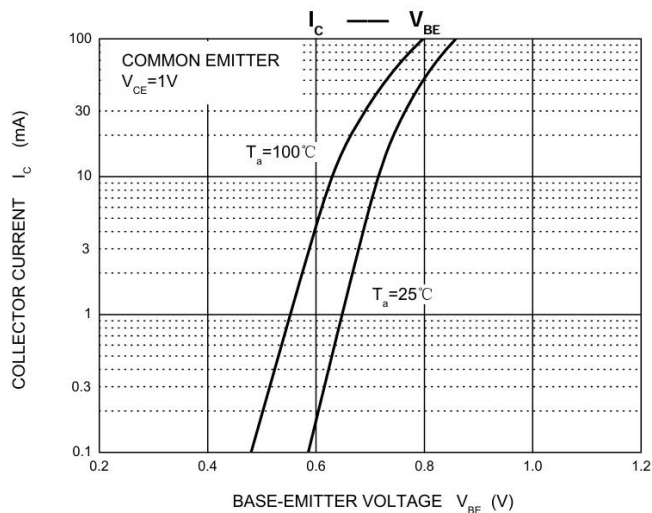





MMBT3904

NPN SILICON TRANSISTOR

SOT23 PACKAGE OUTLINE DIMENSIONS

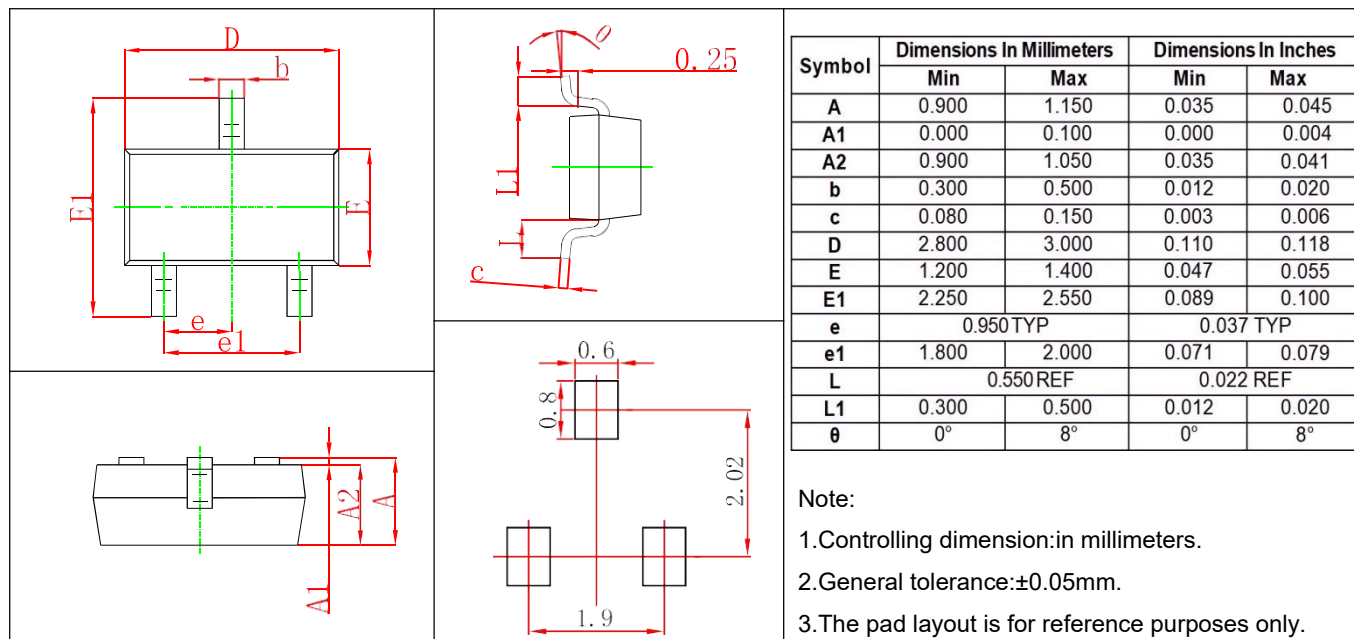

REEL PACKING

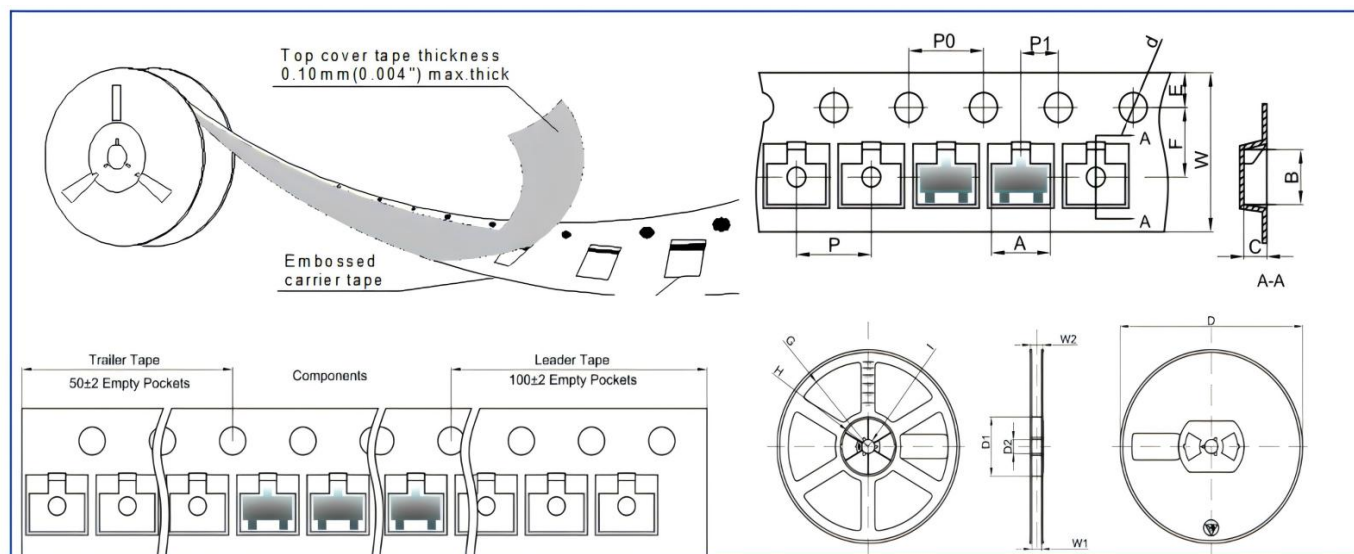

Dimensions are in millimeter										
PKG TYPE	A	B	C	d	E	F	Po	P	P1	W
SOT-23	3.15	2.77	1.22	Φ1.50	1.75	3.50	4.00	4.00	2.00	8.00
Reel Option	D	D1	D2	G	H	I	W1	W2	Q.TY PER REEL	
7" Dia	Φ178.0	54.40	13.00	R78.00	R25.60	R6.50	9.50	12.30	3000PCS	
13"Dia	φ330.0	/	13.00	/	/	R6.50	9.50	12.30	10000PCS	