



MBR30100CT



SCHOTTKY BARRIER RECTIFIER

DESCRIPTION

The MBR30100CT meet the ROHS and Green Product requirement with full function reliability approved.

FEATURE

- *Schottky Barrier Chip.
- *Guard Ring Die Construction for Transient Protection.
- *Low Power Loss,High Efficiency.
- *High Surge Capability.
- *High Current Capability and Low Forward Voltage Drop.
- *For Use in Low Voltage, High Frequency Inverters,Free Wheeling, and Polarity Protection Applications.



MARKING



: HY LOGO

MBR30100CT=Device Code

XXXX=Date Code

Solid Dot=Green molding compound

ABSOLUTE MAXIMUM RATINGS(TA=25°C, unless otherwise specified.)

SYMBOL	PARAMETER	VALUE	UNIT
VRRM	Peak repetitive reverse voltage	100	V
VRWM	Working peak reverse voltage		V
VR	DC blocking voltage		V
VR(RMS)	RMS reverse voltage	70	V
Io	Average forward rectified output current	30(15*2)	A
IFSM	Non-Repetitive Peak Forward Surge Current 8.3ms Single Half-Sine-Wave	200*2	A
Tj	Junction temperature	175	°C
Tstg	Storage temperature	-55~+150	°C
RθJA	Thermal Resistance from Junction to Ambient	62.5	°C/W
RθJC	Thermal Resistance From Junction To Case	3	°C/W

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.



MBR30100CT

SCHOTTKY BARRIER RECTIFIER

■ ELECTRICAL CHARACTERISTICS (TA=25°C, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Reverse voltage	$V_{(BR)}$	$I_R=0.1mA$	100			V
Instantaneous Reverse Current	I_R	$V_R=100V$		$T_J=25^{\circ}C$	5.0	100 μA
				$T_{J1}=25^{\circ}C$	5.0	mA
Instantaneous Forward Voltage Drop	V_{F1}	$I_F=10A$	$T_J=25^{\circ}C$	0.772	0.82	V
			$T_{J1}=25^{\circ}C$	0.64		V
		$I_F=15A$	$T_J=25^{\circ}C$	0.833	0.85	V
			$T_{J1}=25^{\circ}C$	0.70		V

Notes: Pulse Test: Pulse Width $\leq 300\mu s$, Duty Cycle $\leq 2.0\%$

■ TYPICAL CHARACTERISTICS

FIG.1: FORWARD CURRENT DERATING CURVE

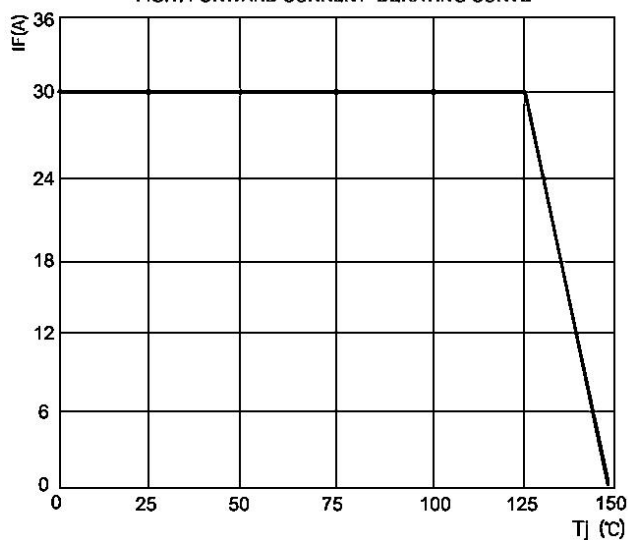


FIG.2: TYPICAL FORWARD CHARACTERISTICS

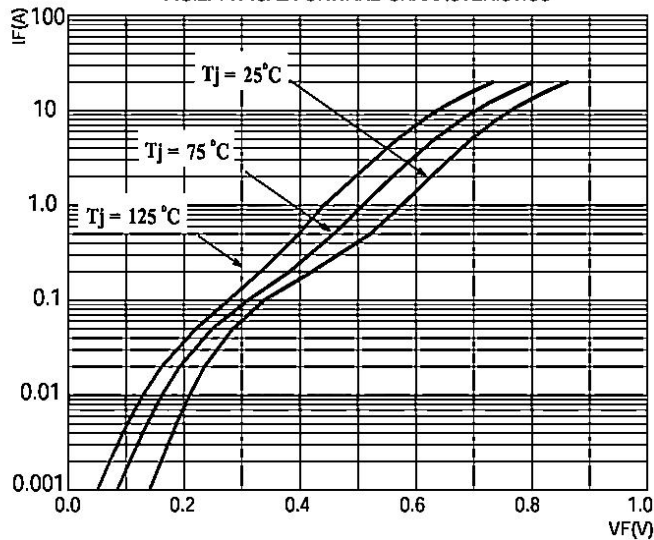


FIG.3: TOTAL CAPACITANCE DERATING CURVE


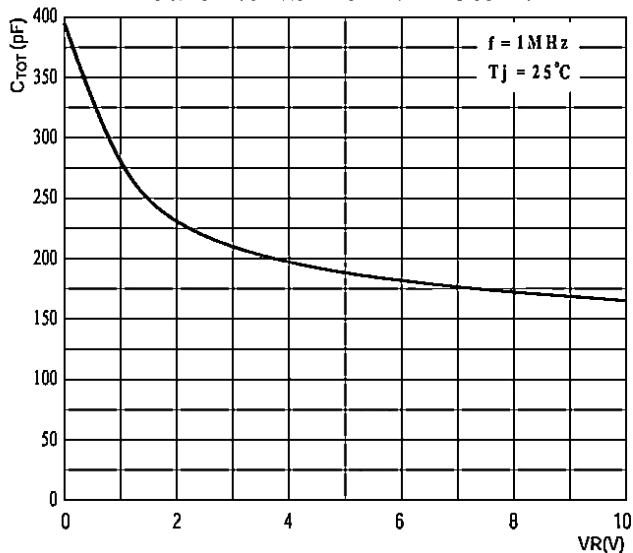


FIG.4: TYPICAL REVERSE CHARACTERISTICS




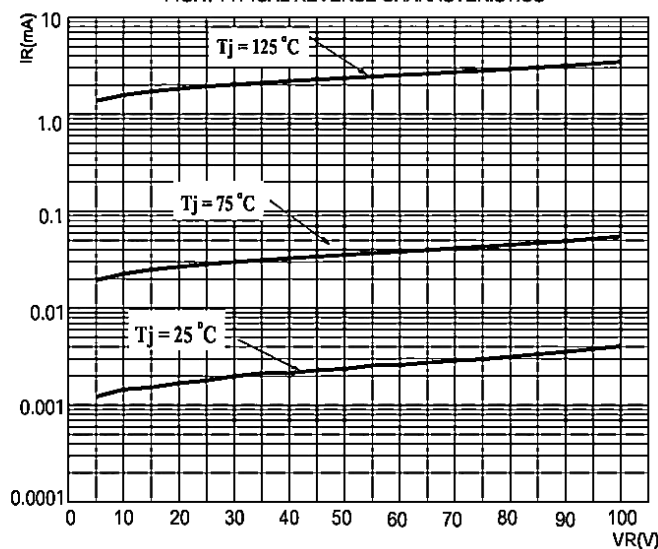

MBR30100CT

SCHOTTKY BARRIER RECTIFIER

TO - 220F Package Outline Dimensions

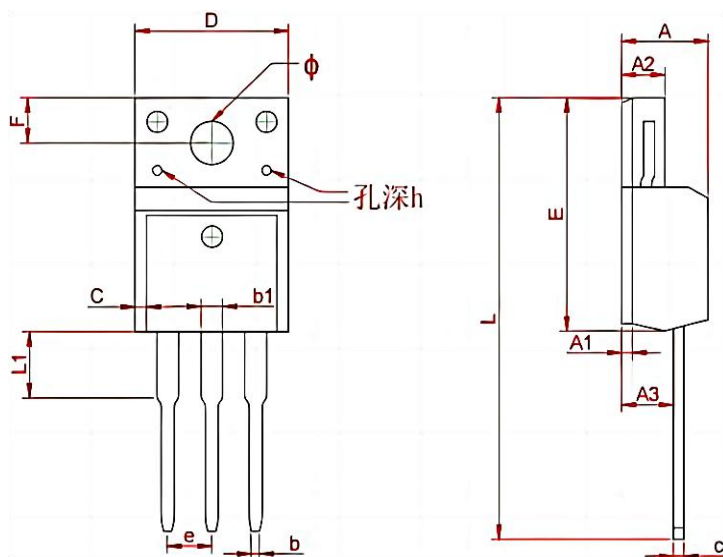

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max	Min	Max
A	4.300	4.750	0.169	0.185
A1	1.830 REF		0.072 REF	
A2	2.300	2.850	0.090	0.112
A3	2.500	2.900	0.098	0.114
b	0.400	0.420	0.016	0.016
b1	1.220	1.280	0.048	0.050
C	0.690	0.720	0.027	0.028
c	0.490	0.510	0.019	0.020
D	9.960	10.200	0.392	0.400
E	15.000	15.950	0.588	0.625
e	2.574 TYP		0.101TYP	
F	3.470 REF		0.136 REF	
y	3.200 REF		0.125 REF	
h	0.000	0.300	0.000	0.012
L	28.780	28.900	1.128	1.133
L1	2.990	3.100	0.117	0.122

TO - 220F Packing Information



50PCS



20 Tube



Outer Box

5 Inner
Box



Inner Box

Package version	Tube dimensions LxWxH (mm)	Per Tube (pcs)	Tube per box	Inner box dimensions LxWxH (mm)	PCS/ Inner box	Outer box dimensions LxWxH(mm)	PCS/ Outer box
TO-220F	530*32*7	50	20	580*155*50	1000	602*277*188	5000