





BT150

SCR

GENERAL DESCRIPTION

Passivated thyristors in a plastic envelope, intended for use in applications requiring high bidirectional blocking voltage capability and high thermal cycling performance. Typical applications include motor control, industrial and domestic lighting, heating and static switching.



Pin1:K (Cathode)
Pin2:A (Anode)
Pin3:G (Gate)

MARKING



HY: HY LOGO

BT150=Device Code

800E:V_{DRM}/V_{RRM}=800V

XXXX=Date Code

Solid Dot=Green molding compound

ABSOLUTE MAXIMUM RATINGS (TC=25°C, unless otherwise specified)

SYMBOL	PARAMETER		TEST CONDITION	VALUE	UNIT
V _{DRM} /V _{RRM} M	Repetitive Peak off-state/reverse voltage	BT150-500	(T _j =25℃)	500	V
		BT150-650		650	
		BT150-800		800	
I _{T(AV)}	Average On-State Current (half sine wave;TC≤113℃)			2.5	A
I _{T(RMS)}	RMS forward current(all conduction angles)			4	A
I _{TSM}	Non-repetitive peak on-state current (half sine wave;T _j =25℃ prior to surge)		t=10ms	35	A
			t=8.3ms	38	
I _{GM}	Peak gate current			2	A
V _{GM}	Peak gate voltage			5	V
I ² t	Circuit fusing		t=10ms	6.1	A ² S
P _{G(AV)}	Average gate Power(over any 20ms period)		T _j =125℃	0.5	W
P _{GM}	Peak gate Power			5	W
T _j	Operating Junction Temperature			125	℃
T _{stg}	Storage Temperature			-40 to +150	℃
di/dt	Critical rate of rise of on-state current I _{TM} = 1.5A; I _G = 200mA; di _G /dt = 200mA/μs		T _j =125℃	50	A/μs

Notes: 1. Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

2. Although not recommended, off-state voltages up to 800V may be applied without damage, but the thyristor may switch to the on-state. The rate of rise of current should not exceed 15A/μs.

3. Operation above 110°C may require the use of a gate to cathode resistor of 1kΩ or less.



BT150

SCR

■ THERMAL RESISTANCES

PARAMETER		SYMBOL	RATINGS	UNIT
Junction to Ambient	TO-252/TO-220F	$R_{\theta JA}$	62.5	$^{\circ}\text{C}/\text{W}$
Junction to Case	TO-220F	$R_{\theta JC}$	3.31	$^{\circ}\text{C}/\text{W}$
	TO-252		2.6	$^{\circ}\text{C}/\text{W}$

■ ELECTRICAL CHARACTERISTICS ($T_J=25^{\circ}\text{C}$, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
-----------	--------	-----------------	-----	-----	-----	------

STATIC CHARACTERISTICS

Gate trigger current	I_{GT}	$V_D=12\text{V}; I_T=0.1\text{A}$		15	200	μA
Gate trigger voltage	I_L	$V_D=12\text{V}; I_{GT}=0.1\text{A}$		0.17	10	mA
Holding current	I_H	$V_D=12\text{V}; I_{GT}=0.1\text{A}$		0.10	6	mA
Gate Trigger Voltage($T_J=110^{\circ}\text{C}$)	V_{GT}	$V_D=12\text{V}, I_T=0.1\text{A};$		0.4	1.5	V
		$V_D=V_{DRM(max)}, I_T=0.1\text{A}$	0.1	0.2	1.5	V
On-State Voltage	V_T	$I_T=5\text{A}$		1.23	1.8	V
Off-state Leakage Current($T_J=125^{\circ}\text{C}$)	I_D, I_R	$V_D=V_{DRM(max)}, V_R=V_{RRM(max)}$		0.1	0.5	mA

DYNAMIC CHARACTERISTICS

Critical Rate of Rise of off-state Voltage	dV_D/dt	$V_{DM}=67\%V_{DRM(max)}, T_J=125^{\circ}$ Exponential waveform $R_{GK}=100\Omega$		50		$\text{V}/\mu\text{s}$
Gate Controlled Turn-on Time	t_{gt}	$I_{TM}=10\text{A}, V_D=V_{DRM}, I_G=0.5\text{mA}$ $dI_G/dt=5\text{A}/\mu\text{s}$		2		μs



BT150

SCR

■ TYPICAL CHARACTERISTICS (1)

Fig 1. Maximum On-State Dissipation, p_{tot} , Versus Average On-State Current, $I_{T(AV)}$, Where $a = \text{form factor} = I_{T(RMS)} / I_{T(AV)}$

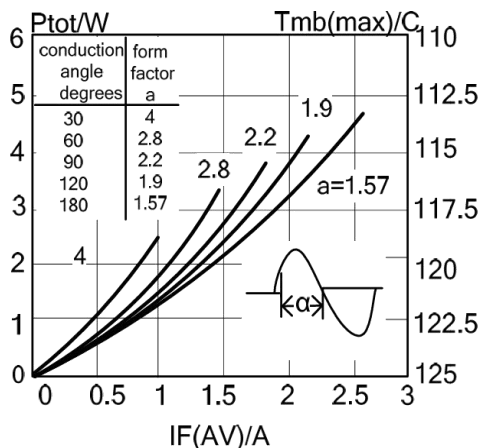


Fig 2. Maximum Permissible Non-Repetitive Peak On-State Current I_{TSM} , Versus Pulse Width t_p for Sinusoidal Currents, $t_p \leq 10\text{ms}$

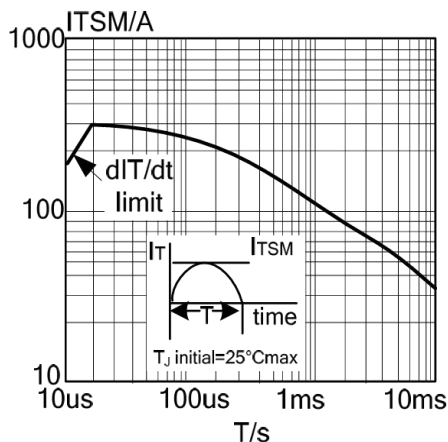


Fig 3. Maximum Permissible Rms Current $I_{T(RMS)}$, Versus Mounting Base Temperature T_{mb}

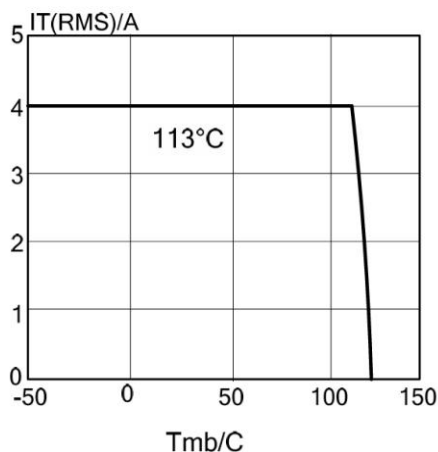


Fig 4. Maximum Permissible Non-Repetitive Peak On-State Current I_{TSM} , Versus Number Of Cycles, For Sinusoidal Currents, $f=50\text{HZ}$

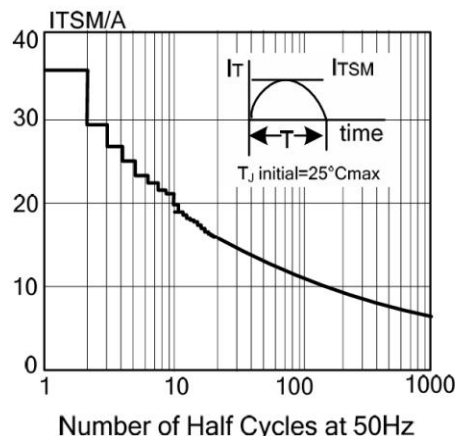


Fig 5. Maximum Permissible Repetitive Rms On-State Current $I_{T(RMS)}$, Versus Surge Duration, For Sinusoidal Currents, $f=50\text{HZ}$; $T_{mb} \leq 113^\circ\text{C}$


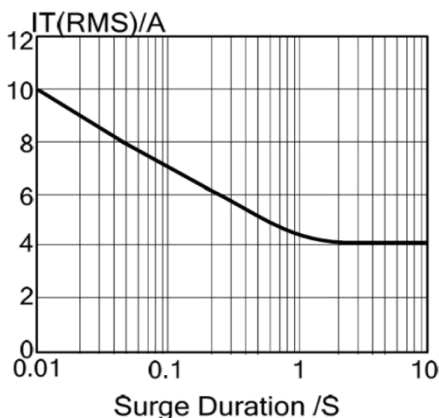


Fig 2. Maximum Permissible Non-Repetitive Peak On-State Current I_{TSM} , Versus Pulse Width t_p for Sinusoidal Currents, $t_p \leq 10\text{ms}$



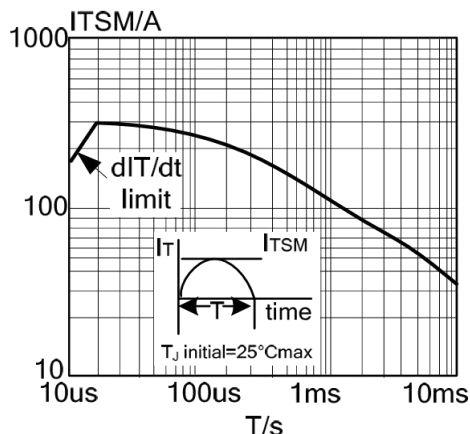

BT150

SCR

■ TYPICAL CHARACTERISTICS (2)

Fig 7. Normalised Gate Trigger Current $I_{GT}(T_J)/I_{GT}(25^\circ\text{C})$, Versus Junction Temperature T_J

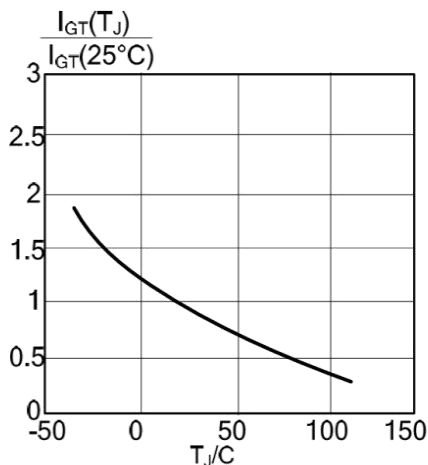


Fig 8. Normalised Latching Current $I_L(T_J)/I_L(25^\circ\text{C})$, Versus Junction Temperature T_J

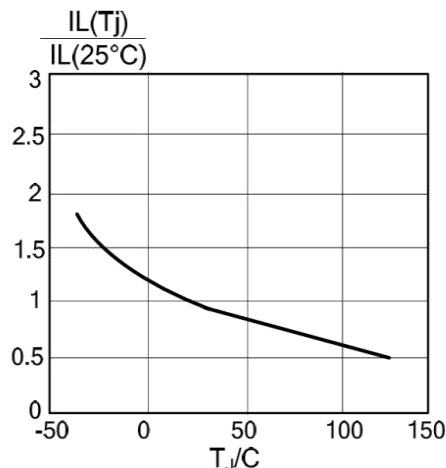


Fig 9. Normalised Holding Current $I_H(T_J)/I_H(25^\circ\text{C})$, Versus Junction Temperature T_J

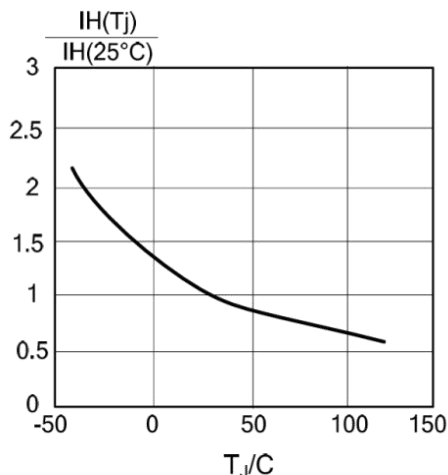


Fig 10. Typical and Maximum On-State Characteristic

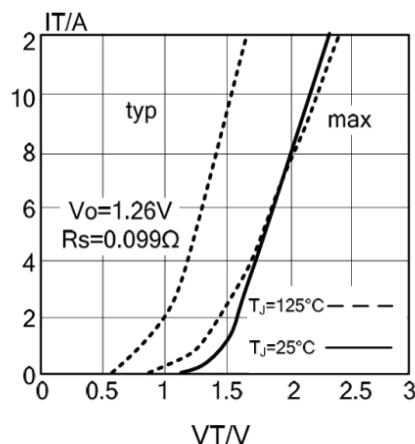


Fig 11. Transient Thermal Impedance Z_{thj-mb} , Versus Pulse Width t_p


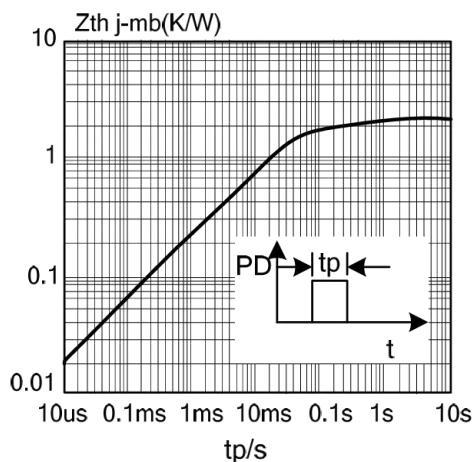


Fig 12. Typical, Critical Rate Of Rise Of Off-State Voltage, dV_D/dt Versus Junction Temperature T_J




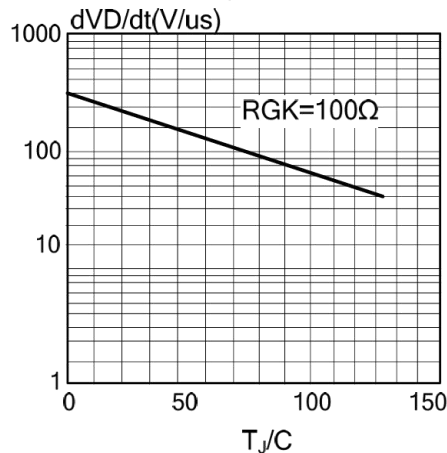

BT150

SCR

TO-220F PACKAGE OUTLINE DIMENSIONS

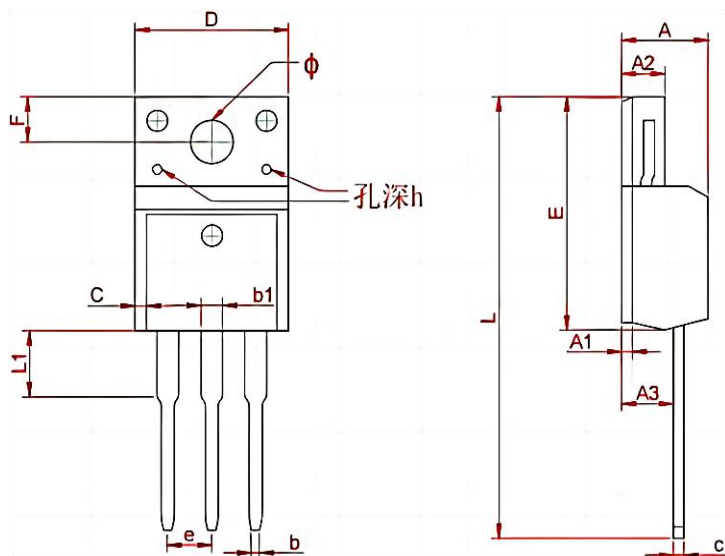


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max	Min	Max
A	4.300	4.750	0.169	0.185
A1	1.830 REF		0.072 REF	
A2	2.300	2.850	0.090	0.112
A3	2.500	2.900	0.098	0.114
b	0.400	0.420	0.016	0.016
b1	1.220	1.280	0.048	0.050
C	0.690	0.720	0.027	0.028
c	0.490	0.510	0.019	0.020
D	9.960	10.200	0.392	0.400
E	15.000	15.950	0.588	0.625
e	2.574 TYP		0.101TYP	
F	3.470 REF		0.136 REF	
y	3.200 REF		0.125 REF	
h	0.000	0.300	0.000	0.012
L	28.780	28.900	1.128	1.133
L1	2.990	3.100	0.117	0.122

TO - 220F PACKING INFORMATION



50PCS

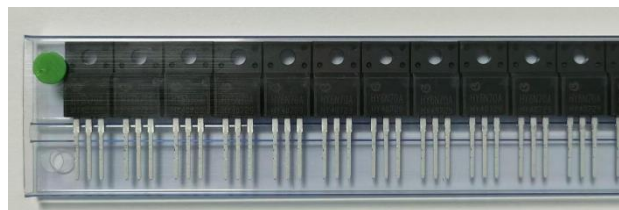

20 Tube



Outer Box

5 Inner
Box



Inner Box

Package version	Tube dimensions LxWxH (mm)	Per Tube (pcs)	Tube per box	Inner box dimensions LxWxH (mm)	PCS/ Inner box	Outer box dimensions LxWxH(mm)	PCS/ Outer box
TO-220F	530*32*7	50	20	580*155*50	1000	602*277*188	5000

