




BTA04

TRIAC

GENERAL DESCRIPTION

*The BTA04 is a 4A triacs, it uses ours advanced technology to provide customers with high commutation performances and voltage insulated tab, etc.


*The BTA04 is suitable for inductive loads, general purpose AC switching and an ON/OFF function in applications such as induction motor starting circuits, for phase control operation in light dimmers and static relays, etc.



FEATURES

*Low gate trigger current

*Low holding current



Pin1:T1 Pin2:T2 Pin3:G

MARKING



HY : HY LOGO

BTA04=Device Code

800E:VDRM/VRRM=800V

XXXX=Date Code

Solid Dot=Green molding compound

ABSOLUTE MAXIMUM RATINGS (TC=25°C, unless otherwise specified)

SYMBOL	PARAMETER		TEST CONDITION	VALUE	UNIT
V _{DRM} /V _{RRM}	Repetitive Peak off-state/reverse voltage	BTA04-600	Tj = 125°C	600	V
		BTA04-800		800	
IT(RMS)	RMS On-State Current			4	A
ITSM	Non Repetitive Surge Peak On-State Current (TJ initial=25°C)		t=8.3ms	42	A
			t=10ms	40	
IGM	Peak Gate Current		t=20μs	4	A
I² t	I²t Value		t=10ms	8	A² S
di/dt	Critical Rate of Rise of On-State Current: IG=50mA, dIG/dt=0.1A/μs		Repetitive;F=50Hz	10	A/μs
			Non Repetitive	50	
PG(AV)	Average Gate Power Dissipation			1	W
PGM	Peak Positive Gate Power Dissipation			40	W
VGM	Peak Positive Gate Voltage			16	V
Tstg	Storage Junction Temperature			-40 to +150	°C
Tj	Operating junction temperature			125	°C

Note : Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.



BTA04

TRIAC

THERMAL DATA

PARAMETER		SYMBOL	RATINGS	UNIT
Junction to Ambient	TO-220F	R θ JA	62.5	°C/W
Junction to Case	TO-220F	R θ JC	3.31	°C/W

ELECTRICAL CHARACTERISTICS (T_c=25°C unless otherwise noted)

FOR STANDARD (4 QUADRANTS)

SYMBOL	CHARACTERISTICS			MIN	TYP	MAX	UNIT
I _{GT}	Gate trigger current(continuous dc)	T2+, G+	V _D =12V, R _L =100Ω			35	mA
		T2+, G -				35	
		T2-, G -				35	
		T2-, G+				80	
V _{GT}	Gate Trigger Voltage (Continuous dc)	T2+, G+	V _D =12V, R _L =100Ω			1.5	V
		T2+, G -				1.5	
		T2-, G -				1.5	
		T2-, G+				1.5	
V _{GD}	Gate threshold Voltage(T _j =125°C)	I-II-III-IV	V _D =1/2V _{DRM} , R _L = 3.3K Ω	0.2			V
dv/dt	Critical Rate of Rise of Off-State Voltage at Commutation		V _D =0.67V _{DRM} ;gate open T _j =125°C	40			V/μs
I _H	Holding Current		I _T =0.5A			60	mA
I _L	latching current		I _T =0.5A			60	mA
			I _G =1.2I _{GT}			100	
dv/dt	Critical Rate of Rise of off-state Voltage		V _D =2/3V _{DRM} ; T _j =125°C	500			V/us

STATIC CHARACTERISTICS

PARAMETER	SYMBOL	TEST CONDITIONS		MIN	TYP	MAX	UNIT
Peak On-State Voltage	V _{TM}	I _{TM} =12A, t _p =380μs	T _J =25°C			1.5	V
Threshold Voltage	V _{TO}		T _J =125°C			0.92	V
Dynamic Resistance	R _D		T _J =125°C			36.6	mΩ
Repetitive Peak Off-State Current	I _{DRM}	V _{DRM} =V _{RRM}	T _J =25°C			5	μA
	I _{RRM}		T _J =125°C			0.5	mA



BTA04

TRIAC

■ TYPICAL CHARACTERISTICS

FIG1

Maximum power dissipation versus RMS on-state current

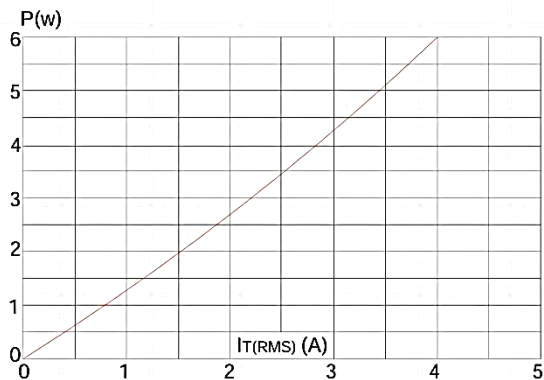


FIG2

RMS on-state current versus case temperature

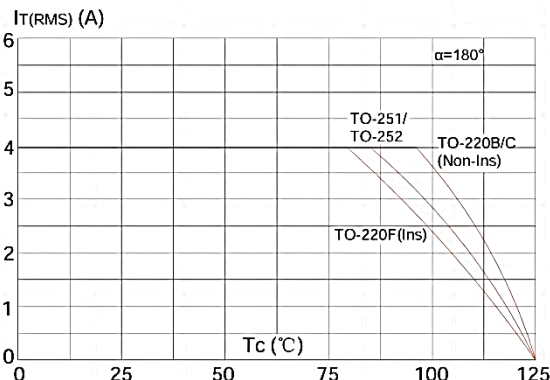


FIG3

Surge peak on-state current versus number of cycles

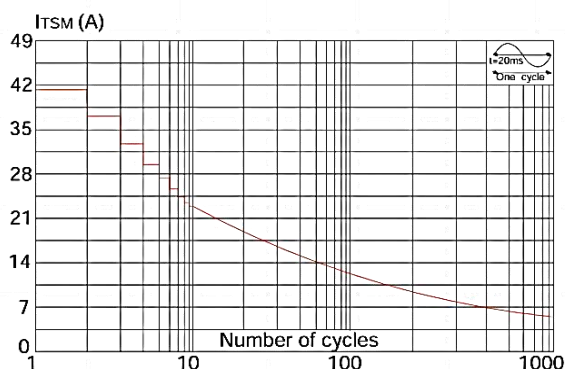


FIG4

On-state characteristics (maximum values)

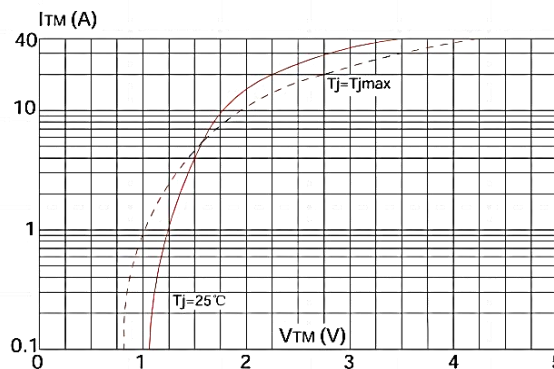


FIG5

Non-repetitive surge peak on-state current for a sinusoidal pulse with width $t_p < 20ms$, and corresponding value of I^2t ($di/dt < 100A/\mu s$)


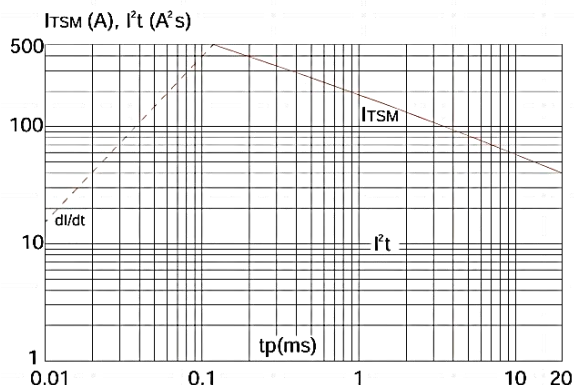


FIG6

FIG.6: Relative variations of gate trigger current, holding current and latching current versus junction temperature




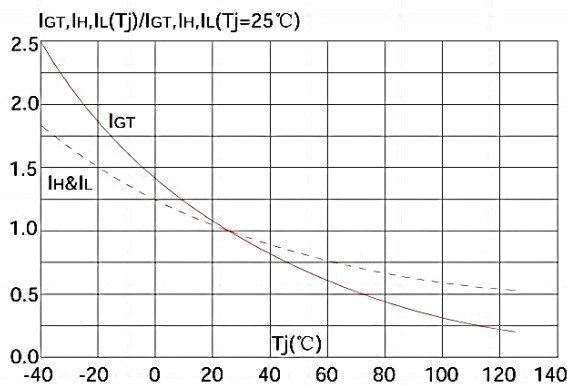

BTA04

TRIAC

TO - 220F PACKAGE OUTLINE DIMENSIONS

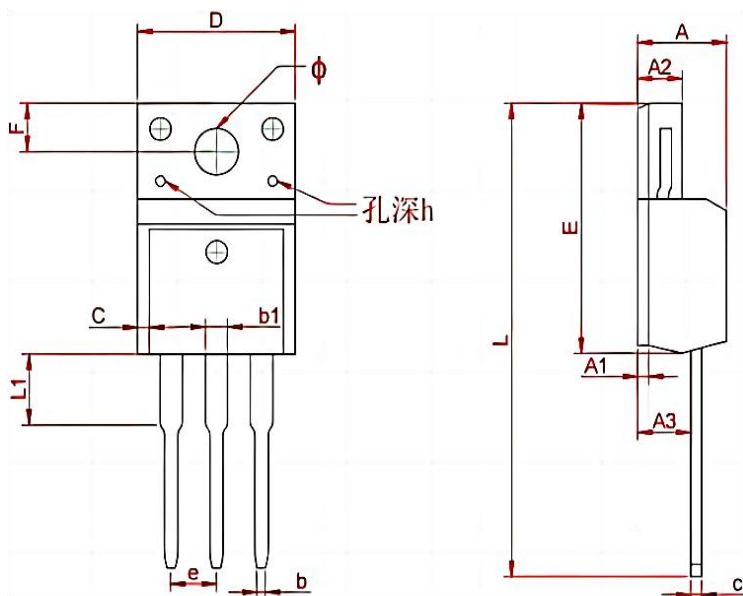

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max	Min	Max
A	4.300	4.750	0.169	0.185
A1	1.830 REF		0.072 REF	
A2	2.300	2.850	0.090	0.112
A3	2.500	2.900	0.098	0.114
b	0.400	0.420	0.016	0.016
b1	1.220	1.280	0.048	0.050
C	0.690	0.720	0.027	0.028
c	0.490	0.510	0.019	0.020
D	9.960	10.200	0.392	0.400
E	15.000	15.950	0.588	0.625
e	2.574 TYP		0.101TYP	
F	3.470 REF		0.136 REF	
y	3.200 REF		0.125 REF	
h	0.000	0.300	0.000	0.012
L	28.780	28.900	1.128	1.133
L1	2.990	3.100	0.117	0.122

TO - 220F PACKING INFORMATION



50PCS



20 Tube



Outer Box

5 Inner
Box



Inner Box

Package version	Tube dimensions LxW×H (mm)	Per Tube (pcs)	Tube per box	Inner box dimensions LxW×H (mm)	PCS/ Inner box	Outer box dimensions L×W×H(mm)	PCS/ Outer box
-----------------	----------------------------------	-------------------	--------------	---------------------------------------	-------------------	-----------------------------------	-------------------