





BTA06

TRIAC

GENERAL DESCRIPTION

*The BTA06 is a 6A triacs which can be operated in 3 quadrants, it uses our advanced technology to provide customers with high commutation performances,etc.

*The BTA06 is suitable for AC switching application and phase control application such as fan speed and temperature modulation control, lighting control and static switching relay, either in through-hole or surface-mount packages.



Pin1:T1 Pin2:T2 Pin3:G

MARKING



: HY LOGO

BTA06=Device Code

800E:VDRM/VRRM=800V

XXXX=Date Code

Solid Dot=Green molding compound

ABSOLUTE MAXIMUM RATINGS (TC=25°C, unless otherwise specified)

SYMBOL	PARAMETER		TEST CONDITION	VALUE	UNIT
V _{DRM} /V _{RRM}	Repetitive Peak off-state/reverse voltage		T _J =25°C	800	V
I _{T(RMS)}	RMS On-State Current(Full Sine Wave)		T _c =105°C	6	A
I _{TSM}	Non Repetitive Surge Peak On-State Current ((Full Cycle T _J initial=25°C)		t=20ms;F=50Hz	60	A
			t=16.7ms;F=60Hz	63	
I _{GM}	Peak Gate Current	t _p =20μs	T _J =125°C	4	A
I ² t	I ² t Value for Fusing		t _p =10ms	21	A ² S
di/dt	Critical Rate of Rise of On-State Current: I _G =2×I _{GT} , t _r ≤100ns		F=120Hz;T _J =125°C	50	A/μs
P _{G(AV)}	Average Gate Power Dissipation (T _J =125°C)			1	W
T _{stg}	Storage Junction Temperature			-40 to +150	°C
T _j	Operating junction temperature			125	°C

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.



BTA06

TRIAC

THERMAL RESISTANCES

PARAMETER		SYMBOL	RATINGS	UNIT
Junction to Ambient	TO-220F	R θ JA	62.5	°C/W
Junction to Case	TO-220F	R θ JC	3.31	°C/W

SENSITIVITY AND TYPE

PART NUMBER	VOLTAGE		SENSITIVITY	TYPE
	600V	800V		
B	◎	◎	50mA	STANDARD
C	◎	◎	25mA	STANDARD

◎ : Available

ELECTRICAL CHARACTERISTICS (T_c=25°C unless otherwise noted)

FOR STANDARD (4 QUADRANTS)

PARAMETER	SYMBOL	TEST CONDITIONS	C			B			UNIT
			MIN	TYP	MAX	MIN	TYP	MAX	
Gate Trigger Current (Note 1)	I _{GT}	V _D =12V, R _L =30Ω			25			50	mA
					25			50	
					25			50	
Gate Trigger Voltage	V _{GT}	V _D =12V, R _L =30Ω			1.3			1.3	V
					1.3			1.3	
					1.3			1.3	
Gate Non-Trigger Voltage	V _{GD}	V _D =V _{DRM} R _L =3.3kΩ T _J =125°C	I-II-III	0.2		0.2			V
Holding Current (Note 2)	I _H	I _T =500mA			25			50	mA
Latching Current	I _L	I _G =1.2I _{GT}	I-III		40			50	mA
			II		80			100	mA
Critical Rate of Rise of Off-State Voltage (Note 2)	dV/dt	V _D =67%V _{DRM} (Gate Open) T _J =125°C	200			400			V/μs
Critical Rate of Rise of Off-State Voltage at Commutation (Note 2)	(dV/dt) _c	(dI/dt) _c =2.7A/ms, T _J =125°C	5			10			V/μs




BTA06

TRIAC

■ STATIC CHARACTERISTICS

PARAMETER	SYMBOL	TEST CONDITIONS		MIN	TYP	MAX	UNIT
Peak On-State Voltage	V_{TM}	$I_{TM}=12A$, $t_p=380\mu s$	$T_J=25^\circ C$			1.65	V
Threshold Voltage	V_{TO}		$T_J=125^\circ C$			0.85	V
Dynamic Resistance	R_D		$T_J=125^\circ C$			60	m Ω
Repetitive Peak Off-State Current	I_{DRM}	$V_{DRM}=V_{RRM}$	$T_J=25^\circ C$			5	μA
	I_{RRM}		$T_J=125^\circ C$			1	mA

■ TEST CIRCUITS AND WAVEFORMS

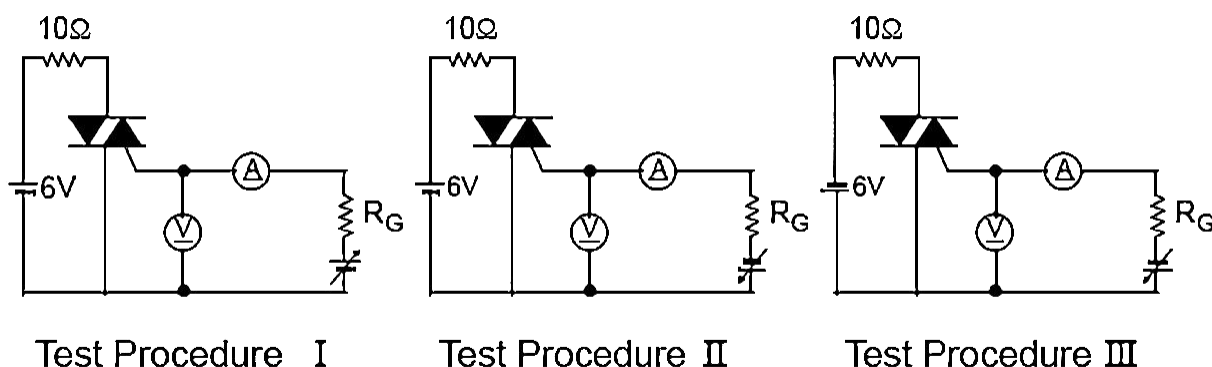

■ TYPICAL CHARACTERISTICS(1)

Figure 1: Maximum power dissipation versus RMS on-state current (full cycle)


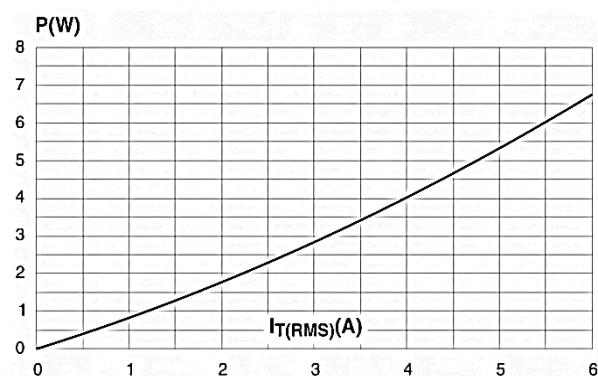


Figure 2: RMS on-state current versus case temperature (full cycle)



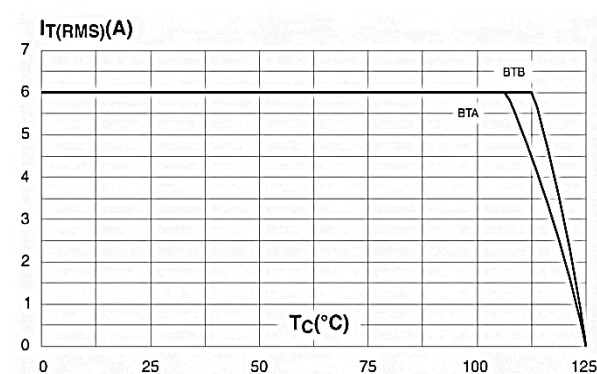

BTA06

TRIAC

■ TYPICAL CHARACTERISTICS(2)

Figure 3: Relative variation of thermal impedance versus pulse duration

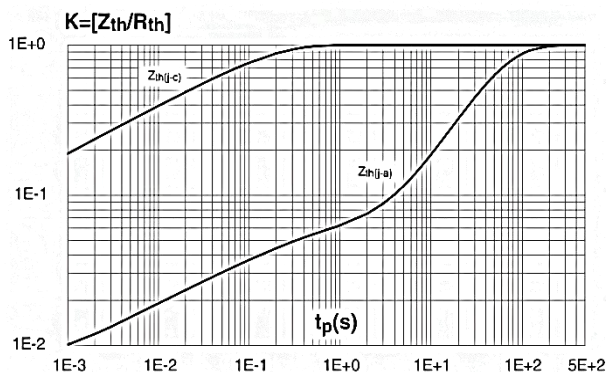


Figure 5: Surge peak on-state current versus number of cycles

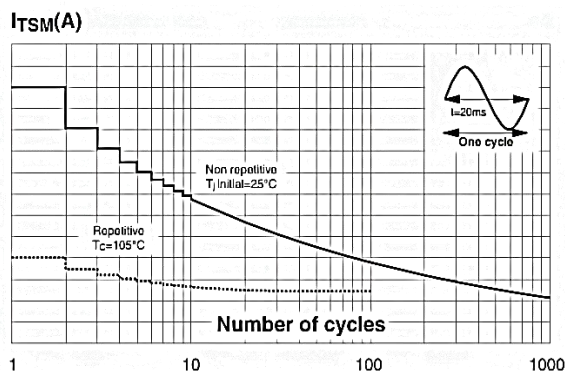


Figure 7: Relative variation of gate trigger current, holding current and latching current versus junction temperature (typical values)

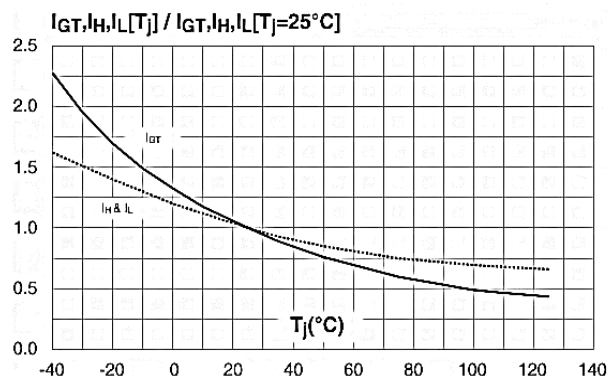


Figure 4: On-state characteristics (maximum values)

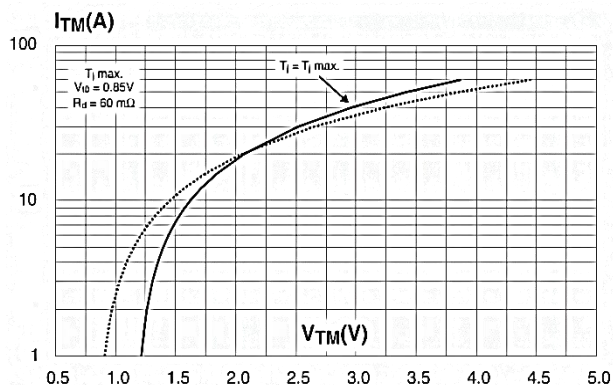


Figure 6: Non-repetitive surge peak on-state current for a sinusoidal pulse with width $t_p < 10$ ms and corresponding value of I^2t


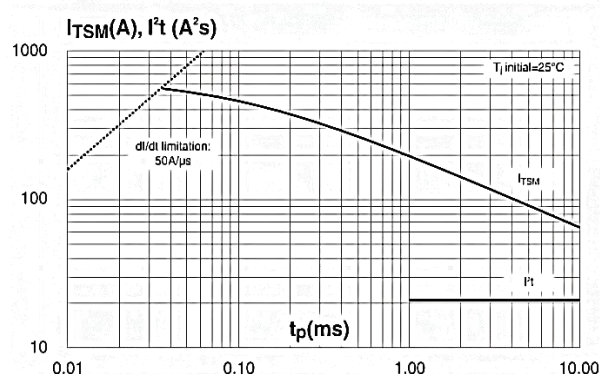


Figure 8: Relative variation of critical rate of decrease of main current versus $(dV/dt)_c$ (typical values) (Snubberless & logic level types)



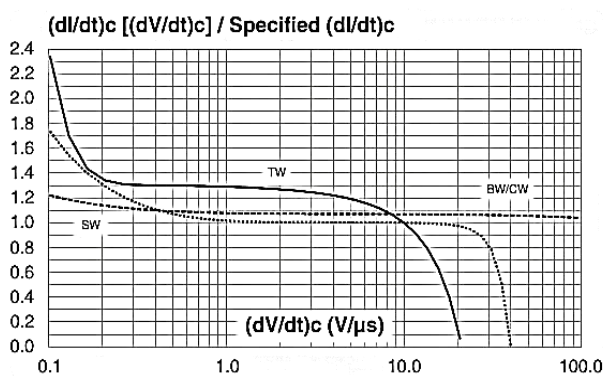

BTA06

TRIAC

■ TYPICAL CHARACTERISTICS(Con.t)

Figure 9: Relative variation of critical rate of decrease of main current versus $(dV/dt)_c$ (typical values) (Standard types)


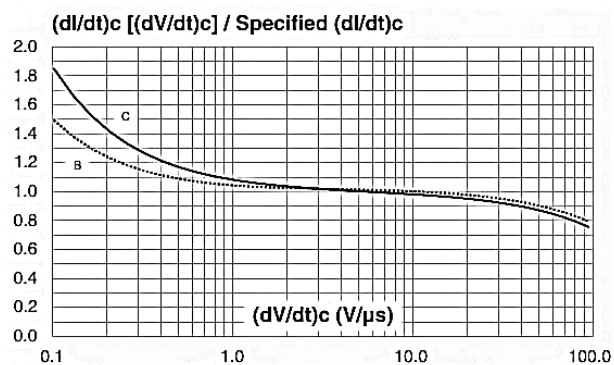


Figure 10: Relative variation of critical rate of decrease of main current versus junction temperature




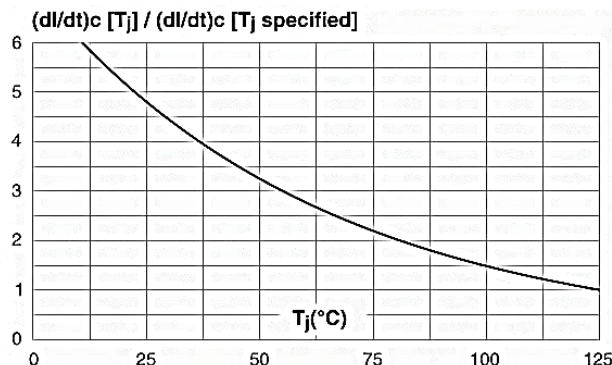

BTA06

TRIAC

TO - 220F PACKAGE OUTLINE DIMENSIONS

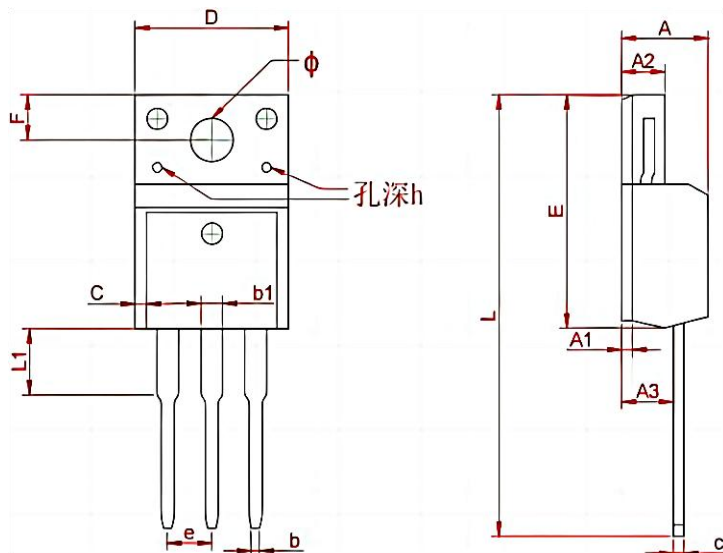

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max	Min	Max
A	4.300	4.750	0.169	0.185
A1	1.830 REF		0.072 REF	
A2	2.300	2.850	0.090	0.112
A3	2.500	2.900	0.098	0.114
b	0.400	0.420	0.016	0.016
b1	1.220	1.280	0.048	0.050
C	0.690	0.720	0.027	0.028
c	0.490	0.510	0.019	0.020
D	9.960	10.200	0.392	0.400
E	15.000	15.950	0.588	0.625
e	2.574 TYP		0.101TYP	
F	3.470 REF		0.136 REF	
y	3.200 REF		0.125 REF	
h	0.000	0.300	0.000	0.012
L	28.780	28.900	1.128	1.133
L1	2.990	3.100	0.117	0.122

TO - 220F PACKING INFORMATION



50PCS



20 Tube



Outer Box

5 Inner
Box



Inner Box

Package version	Tube dimensions LxWxH (mm)	Per Tube (pcs)	Tube per box	Inner box dimensions LxWxH (mm)	PCS/ Inner box	Outer box dimensions LxWxH(mm)	PCS/ Outer box
-----------------	----------------------------------	-------------------	--------------	---------------------------------------	----------------------	-----------------------------------	----------------------