



HY7N70

N-CHANNEL POWER MOSFET

7A, 700V N-CHANNEL POWER MOSFET

DESCRIPTION

The HY7N70A is a high voltage power MOSFET combines advanced planar MOSFET designed to have better characteristics, such as fast switching time, low gate charge, low on-state resistance and high rugged avalanche characteristics. This power MOSFET is usually used in high speed switching applications of switching power supplies and adaptors.

FEATURES

- * $R_{DS(ON)} \leq 1.7 \Omega$ @ $V_{GS}=10V$, $I_D=3.5A$
- * Fast switching capability
- * Avalanche energy tested
- * Improved dv/dt capability, high ruggedness

MARKING




HY : HY LOGO


HY7N70A=Device Code

XXXX=Date Code

Solid Dot=Green molding compound

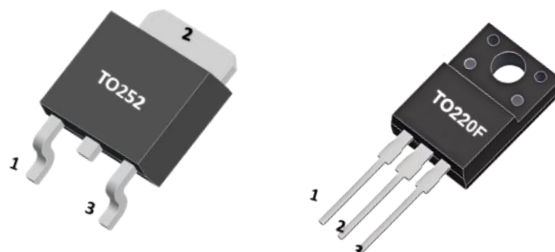

SYMBOL



ABSOLUTE MAXIMUM RATINGS($T_A=25^\circ C$, unless otherwise specified.)

SYMBOL	PARAMETER		VALUE	UNIT
V_{DSS}	Drain-Source Voltage		700	V
V_{GSS}	Gate Source Voltage		±30	V
I_D	Continuous Drain Current	$T_C = 25^\circ C$	7.0	A
I_{DM}	Drain Current Pulsed (Note 2)		14	A
E_{AS}	Avalanche Energy, Single Pulsed (Note 3)		240	mJ
dv/dt	Peak Diode Recovery dv/dt (Note 4)		2.4	V/ns
P_D	Power Dissipation	TO-220F	33	W
		TO-252	55	
T_J	Junction Temperature		150	°C
T_{STG}	Storage Temperature		-40 to 125	°C

Notes: 1. Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.

2. Repetitive Rating: Pulse width limited by maximum junction temperature.

3. $L = 19.5mH$, $I_{AS} = 7.0A$, $V_{DD} = 50V$, $R_G = 25 \Omega$, Starting $T_J = 25^\circ C$

4. $I_{SD} \leq 7.0A$, $di/dt \leq 100A/\mu s$, $V_{DD} \leq BV_{DSS}$, Starting $T_J = 25^\circ C$



HY7N70

N-CHANNEL POWER MOSFET

■ THERMAL DATA

PARAMETER		SYMBOL	RATINGS	UNIT
Junction to Ambient	TO-220F	θ_{JA}	62.5	°C/W
	TO-252		110	
Junction to Case	TO-220F	θ_{JC}	3.79	°C/W
	TO-252		2.27	

Note: Device mounted on FR-4 substrate PC board, 2oz copper, with 1inch square copper plate.

■ ELECTRICAL CHARACTERISTICS (TA=25°C, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
OFF CHARACTERISTICS						
Drain-Source Breakdown Voltage	BVDSS	VGS=0V, ID=250μA	700			V
Drain-Source Leakage Current	IDSS	VDS=700V, VGS=0V			10	μA
Gate-Source Leakage Current	IGSS	VGS=±30V, VDS=0V			±100	nA
ON CHARACTERISTICS						
Static Drain-Source On-State Resistance	RDS(ON)	VGS=10V, ID=3.5A			1.7	Ω
Gate Threshold Voltage	VGS(TH)	VGS=VDS,ID=250μA	2.0		4.0	V
DYNAMIC CHARACTERISTICS						
Input Capacitance	CISS	VDS=25V, VGS=0V, f=1.0MHz		950		pF
Output Capacitance	COSS			91		
Reverse Transfer Capacitance	CRSS			7.2		
SWITCHING PARAMETERS						
Total gate charge(Note 1)	Qg	VDS=560V,VGS=10V ID=7.0A ,IG=1.0mA (Note 1, 2)		23		nC
Gate-source charge	Qgs			6		
Gate-drain charge	Qgd			5		
Turn-On Delay Time(Note 1)	tD(on)	VDS=100V,VGS=10V ID=7A,RG=25Ω (Note 1, 2)		11		nS
Turn-On Rise time	tr			19		
Turn-Off Delay Time	tD(off)			70		
Turn-Off Fall time	tf			33		
DRAIN-SOURCE DIODE CHARACTERISTICS AND MAXIMUM RATINGS						
Maximum Continuous Drain-Source Diode ForwardCurrent	IS				7.0	A
Maximum Pulsed Drain-Source Diode Forward Current	ISM				14	A
Drain-Source Diode Forward Voltage	VSD	VGS = 0 V, ISD =7.0A			1.4	V
Reverse Recovery Time (Note 1)	trr	VGS= 0 V, ISD=7.0A, di/dt = 100 A/μs		532		ns
Reverse Recovery Charge	Qrr			6.1		μC



Note: 1. Pulse test: pulse width ≤ 300us, duty cycle ≤ 2%; 2. Essentially independent of operating temperature.



HY7N70

N-CHANNEL POWER MOSFET

■ TEST CIRCUITS AND WAVEFORMS

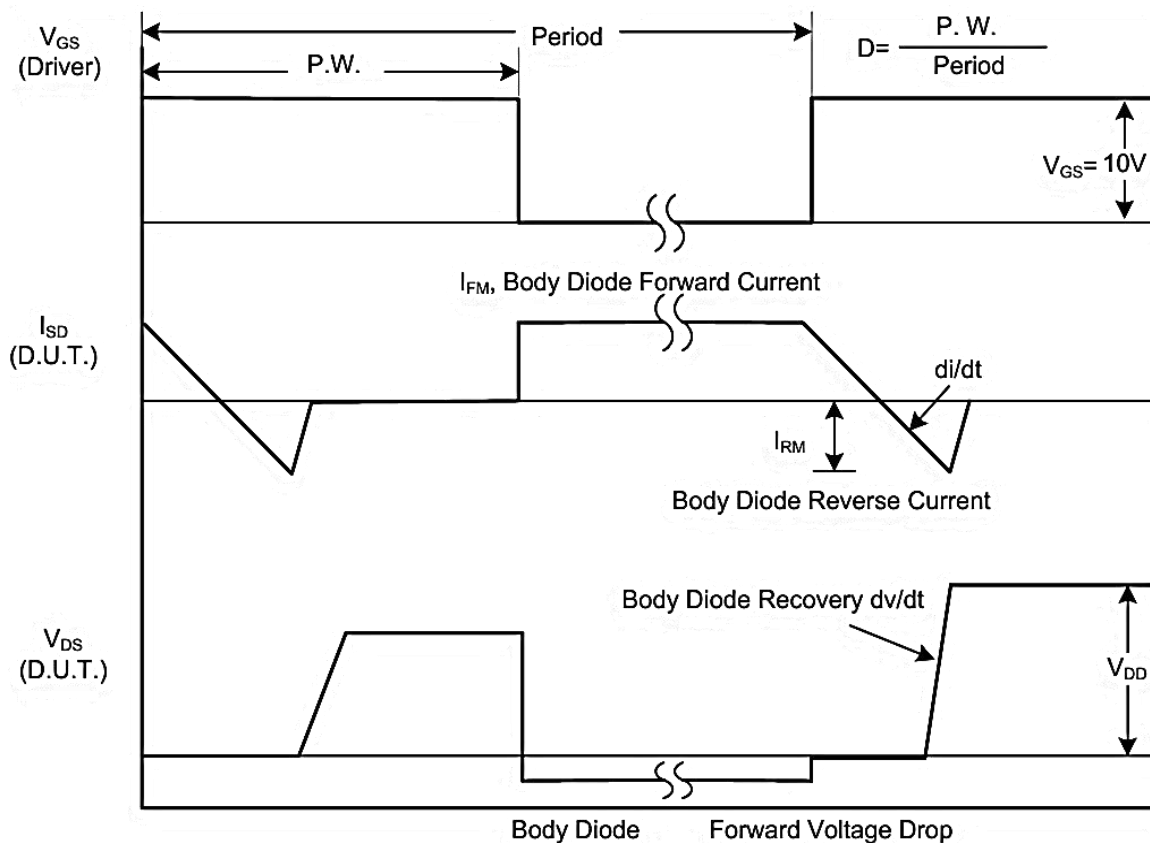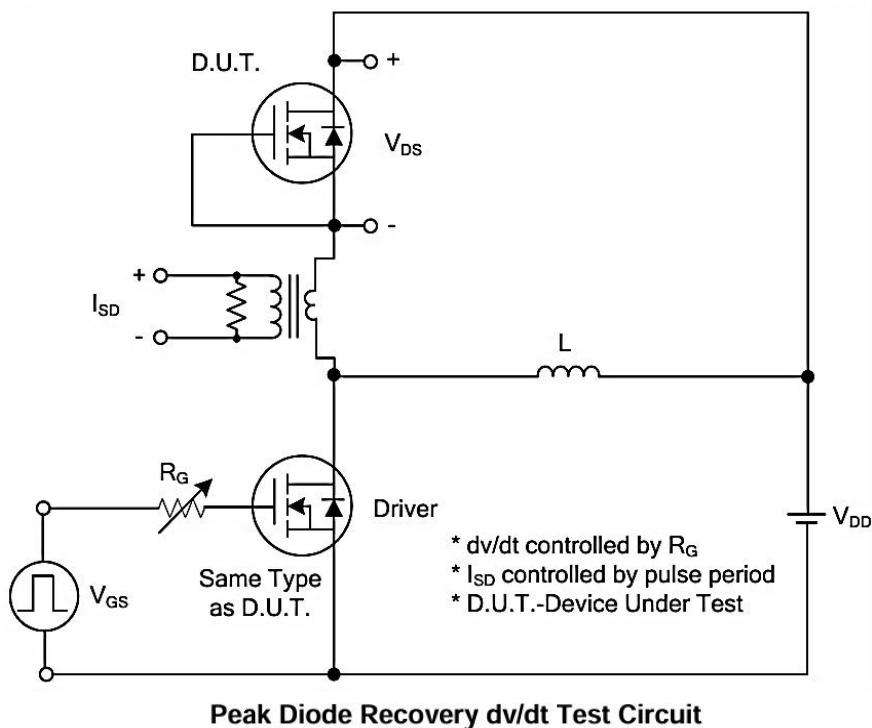


Peak Diode Recovery dv/dt Waveforms




HY7N70

N-CHANNEL POWER MOSFET


■ TEST CIRCUITS AND WAVEFORMS(Con.t)

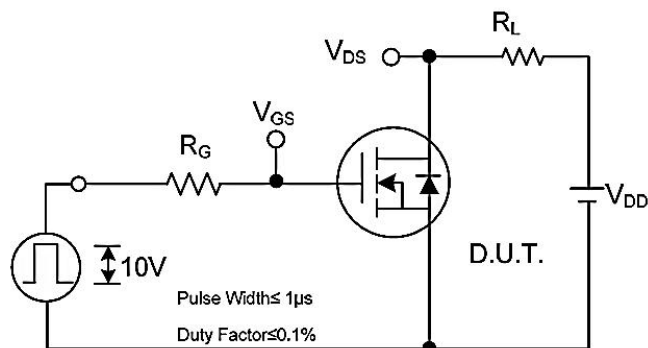


Switching Test Circuit

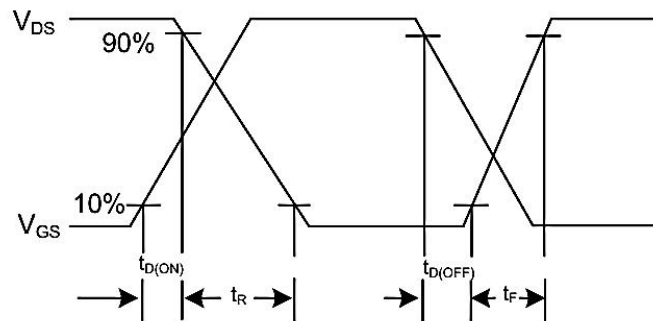


Switching Waveforms

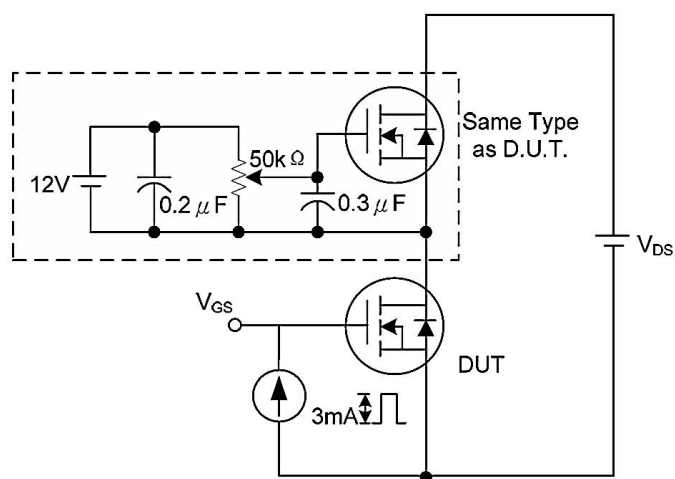


Gate Charge Test Circuit

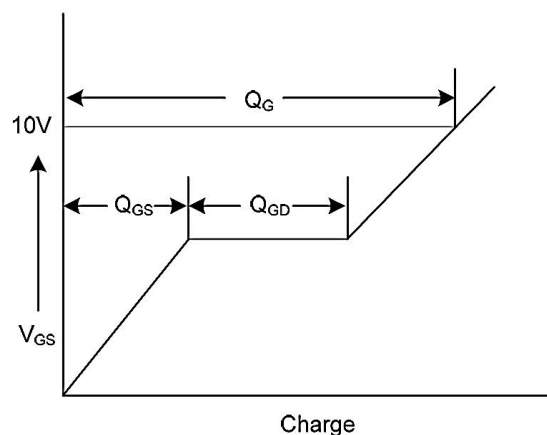

Gate Charge Waveform

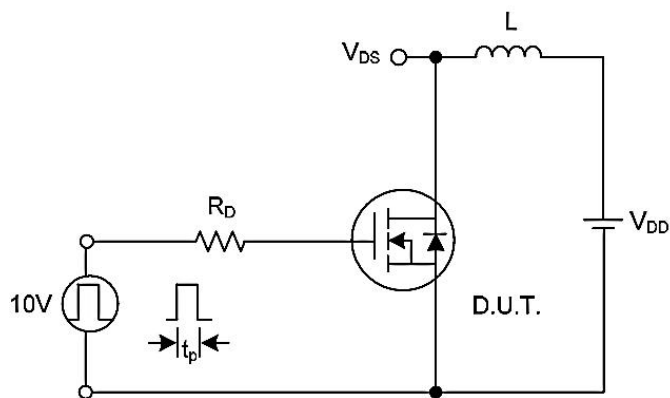

Unclamped Inductive Switching Test Circuit

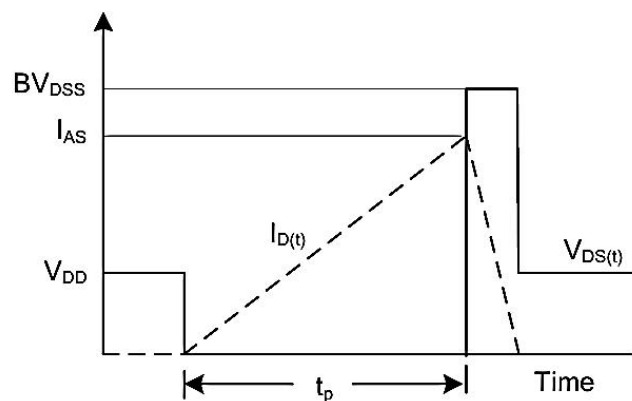







Unclamped Inductive Switching Waveforms



HY7N70

N-CHANNEL POWER MOSFET

■ TYPICAL CHARACTERISTICS(1)

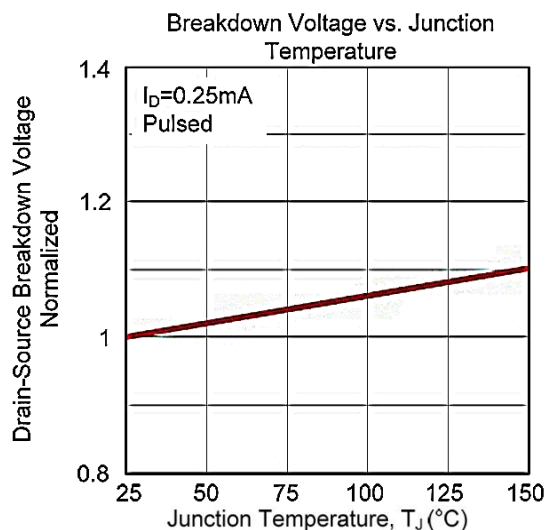
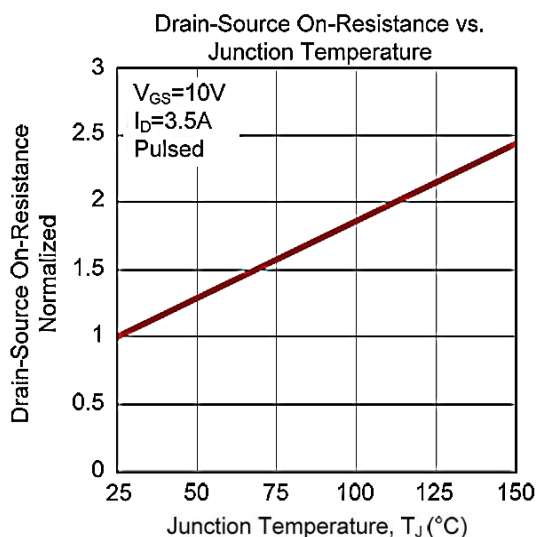
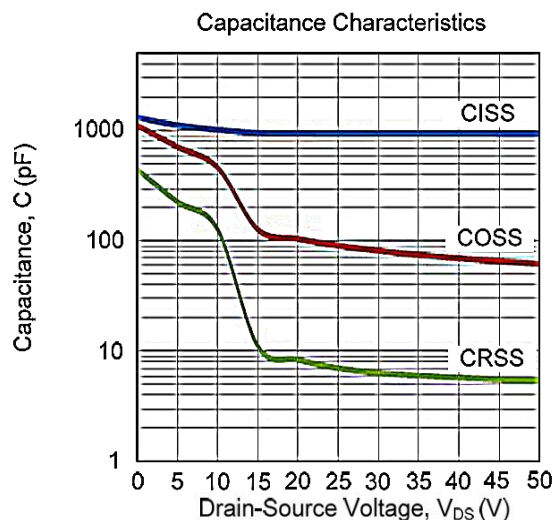
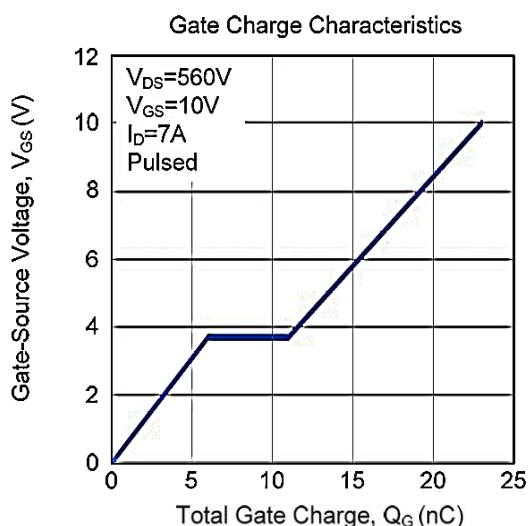
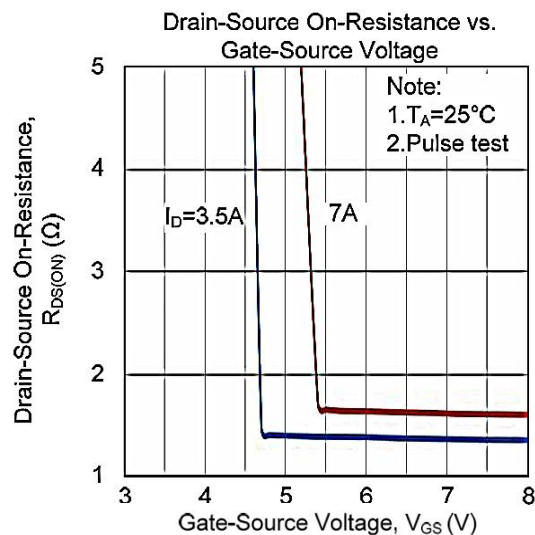
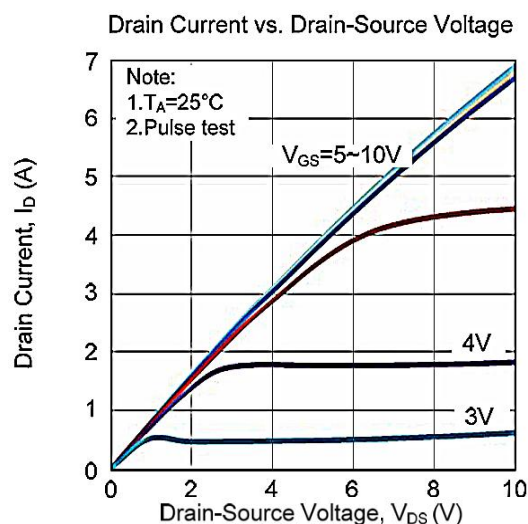




HY7N70

N-CHANNEL POWER MOSFET

■ TYPICAL CHARACTERISTICS(Con.t)

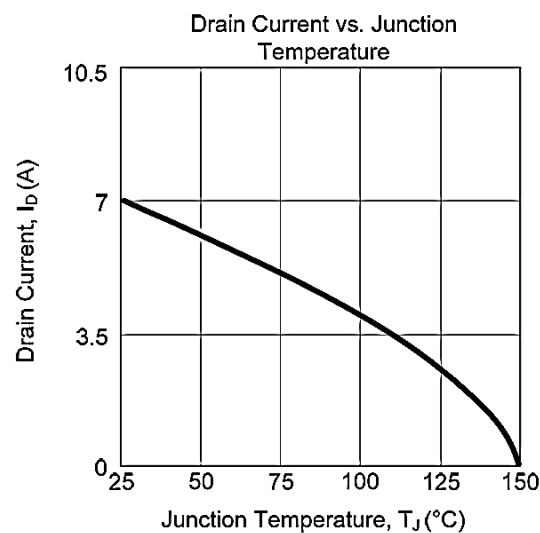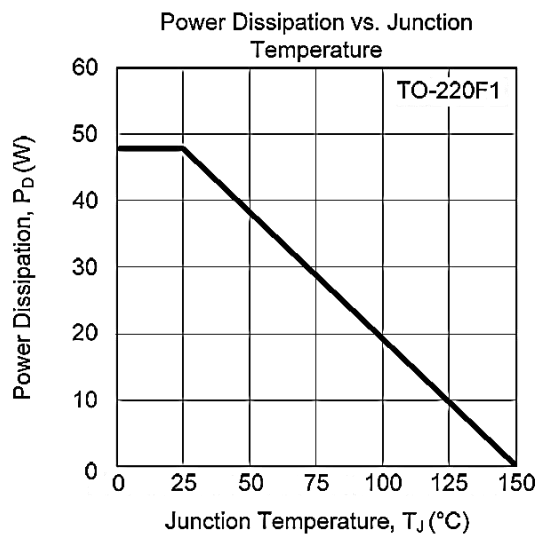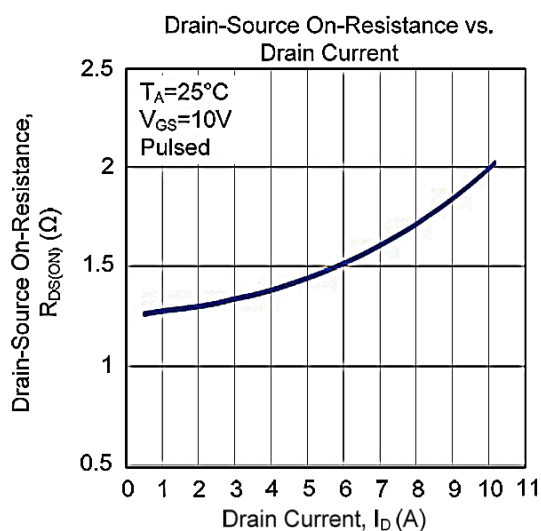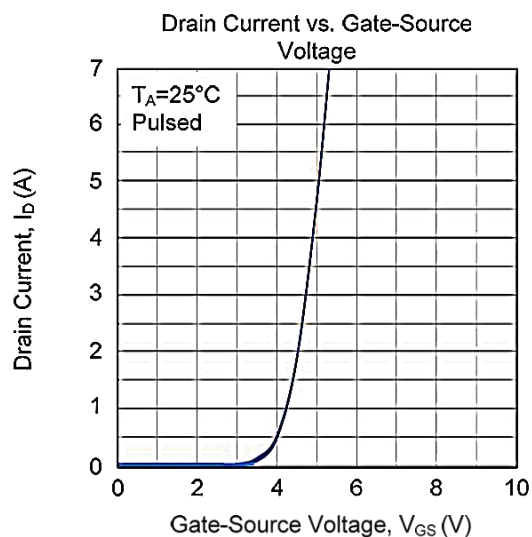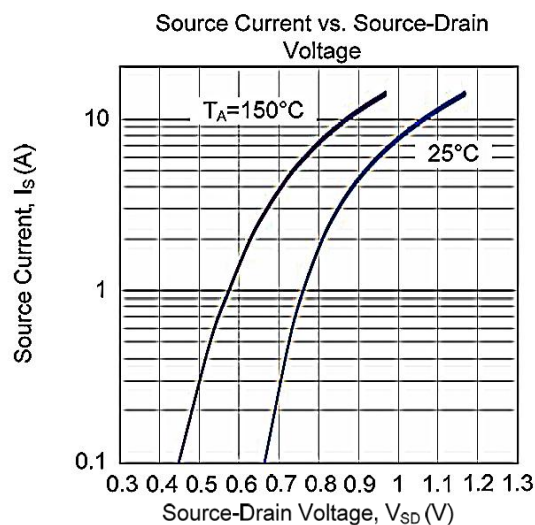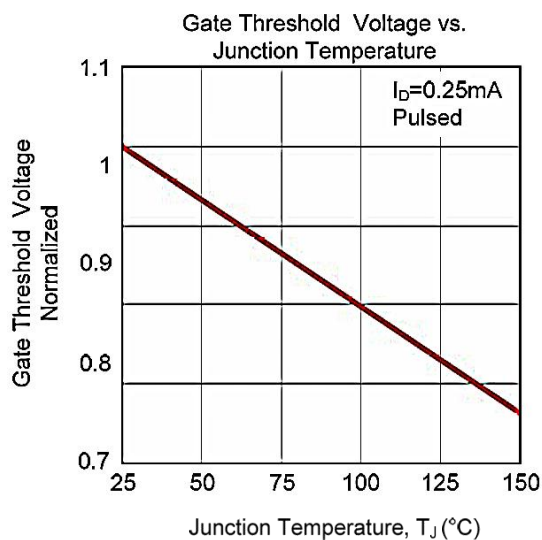




HY7N70

N-CHANNEL POWER MOSFET

TO-220F PACKAGE OUTLINE DIMENSIONS

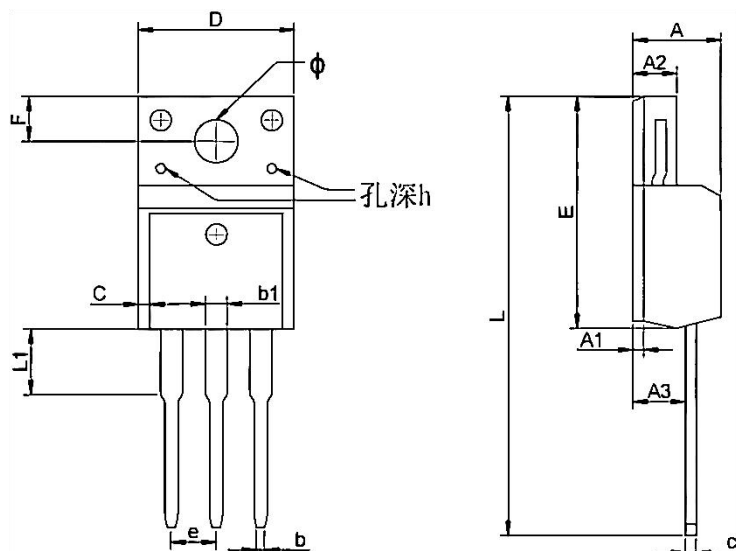

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max	Min	Max
A	4.300	4.750	0.169	0.185
A1	1.830 REF		0.072 REF	
A2	2.300	2.850	0.090	0.112
A3	2.500	2.900	0.098	0.114
b	0.400	0.420	0.016	0.016
b1	1.220	1.280	0.048	0.050
C	0.690	0.720	0.027	0.028
c	0.490	0.510	0.019	0.020
D	9.960	10.200	0.392	0.400
E	15.000	15.950	0.588	0.625
e	2.574 TYP		0.101TYP	
F	3.470 REF		0.136 REF	
y	3.200 REF		0.125 REF	
h	0.000	0.300	0.000	0.012
L	28.780	28.900	1.128	1.133
L1	2.990	3.100	0.117	0.122

TO - 220F PACKING INFORMATION



50PCS




20 Tube



Outer Box

5 Inner
Box

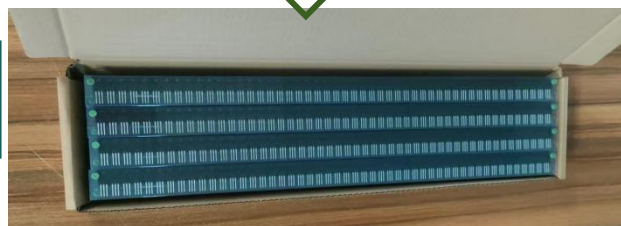

Inner Box



Package version	Tube dimensions LxWxH (mm)	Per Tube (pcs)	Tube per box	Inner box dimensions LxWxH (mm)	PCS/ Inner box	Outer box dimensions LxWxH(mm)	PCS/ Outer box
TO-220F	530*32*7	50	20	580*155*50	1000	602*277*188	5000




HY7N70

N-CHANNEL POWER MOSFET

TO - 252 PACKAGE OUTLINE DIMENSIONS

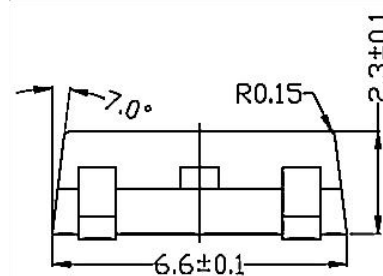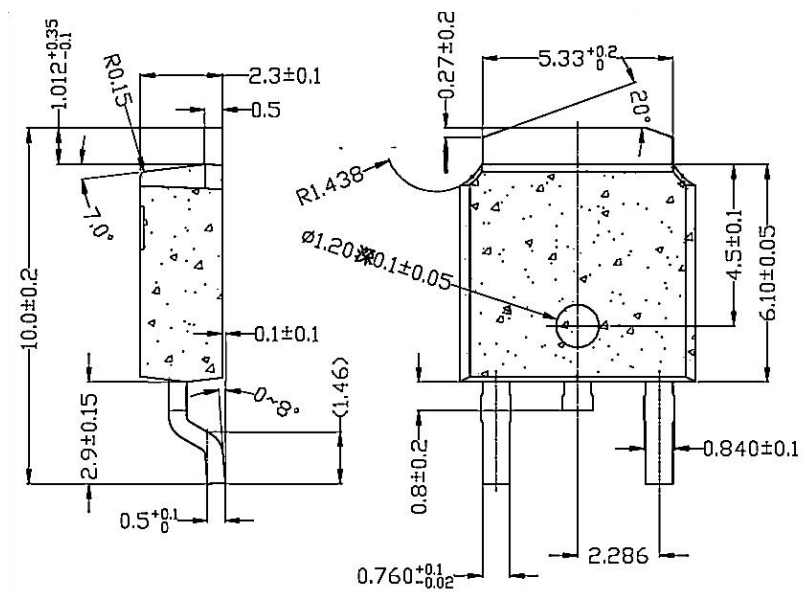

TO - 252 PACKING INFORMATION



2500PC
S/reel



2 Reel/BOX



Outer box

5 Inner
Box



Inner box

Package version	Reel dimensions $\Phi \times H$ (mm)	Per Reel (pcs)	Reels per box	Inner box dimensions $L \times W \times H$ (mm)	Outer box (pcs)	Outer box dimensions $L \times W \times H$ (mm)
TO-252	$\Phi 330 \times 20$	2500	2	360*340*50	25000	375*375*280