



MBR10200CT


SCHOTTKY BARRIER RECTIFIER

DESCRIPTION


The MBR10200CT meet the ROHS and Green Product requirement with full function reliability approved.

FEATURE

- *Schottky Barrier Chip
- *Guard Ring Die Construction for Transient Protection
- *Low Power Loss,High Efficiency
- *High Surge Capability
- *High Current Capability and Low Forward Voltage Drop
- *For Use in Low Voltage, High Frequency Inverters,Free Wheeling, and Polarity Protection Applications

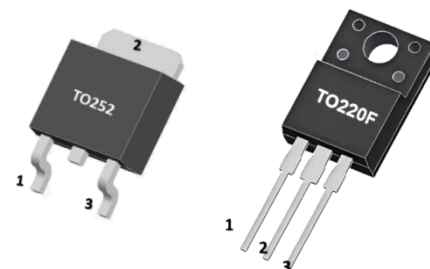

1. ANODE
2. CATHODE
3. ANODE



MARKING



: HY LOGO

MBR10200CT=Device Code

XXXX=Date Code

Solid Dot=Green molding compound

ABSOLUTE MAXIMUM RATINGS(TA=25°C, unless otherwise specified.)

SYMBOL	PARAMETER		VALUE	UNIT
VRRM	Peak repetitive reverse voltage		200	V
VRWM	Working peak reverse voltage		200	V
VR	DC blocking voltage		200	V
VR(RMS)	RMS reverse voltage		140	V
IO	Average rectified output current		10 (5*2)	A
IFSM	Non-Repetitive peak forward surge current(8.3ms half sine wave)		100*2	A
Tj	Junction temperature		175	°C
Tstg	Storage temperature		-55~+150	°C
RθJA	Thermal Resistance fromJunction to Ambient	TO-252	110	°C/W
		TO-220F	60	
RθJC	Thermal Resistance From Junction To Case	TO-252	6	°C/W
		TO-220F	4	

Notes: Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.



MBR10200CT





SCHOTTKY BARRIER RECTIFIER

■ ELECTRICAL CHARACTERISTICS (TA=25°C, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS		MIN	TYP	MAX	UNIT
Reverse voltage	$V_{(BR)}$	$I_R=0.1mA$		200			V
Reverse current	I_R	$V_R=200V$			0.5	5	μA
Forward voltage	V_{F1}	$I_F=3A$	$T_j=25^{\circ}C$		0.82		V
	V_{F2}	$I_F=5A$	$T_j=25^{\circ}C$		0.85	0.88	V
			$T_j=125^{\circ}C$			0.74	V
	V_{F3}	$I_F=10A$	$T_j=25^{\circ}C$			0.95	V
Typical total capacitance	C_{tot}	$V_R=5V, f=1MHz$			50		pF

*Pulsetest:pulsewidth $\leq 300\mu s$,duty cycle $\leq 2.0\%$.

■ TYPICAL CHARACTERISTICS

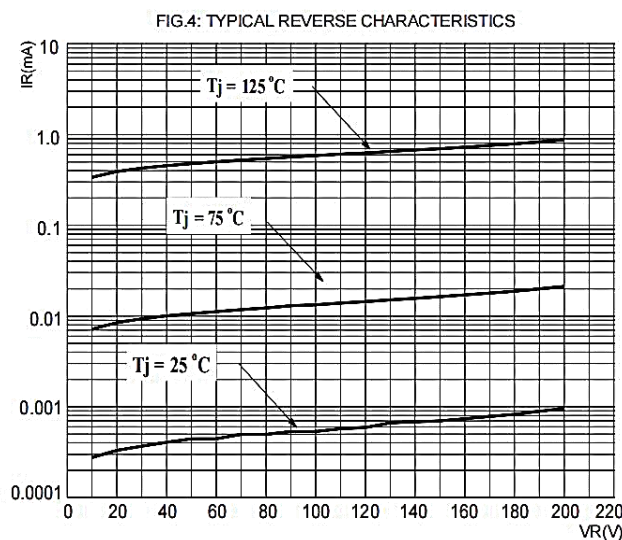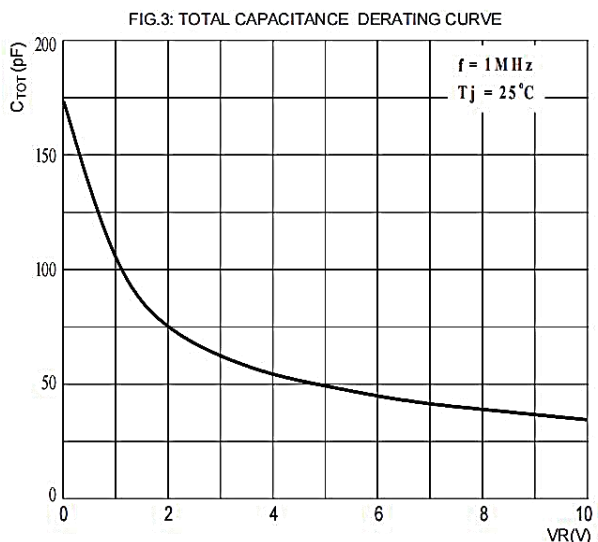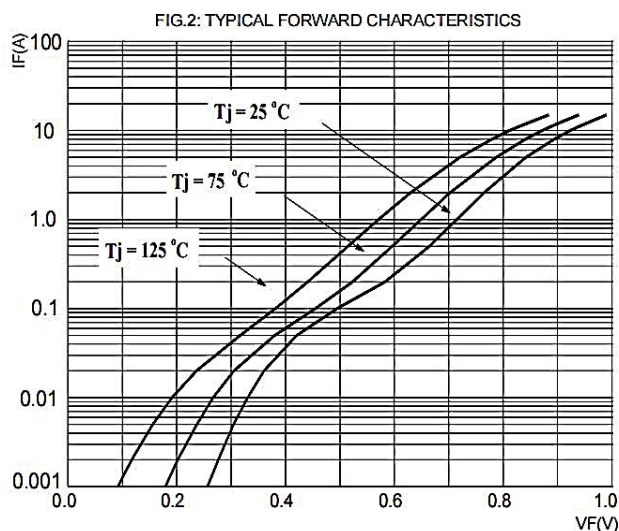
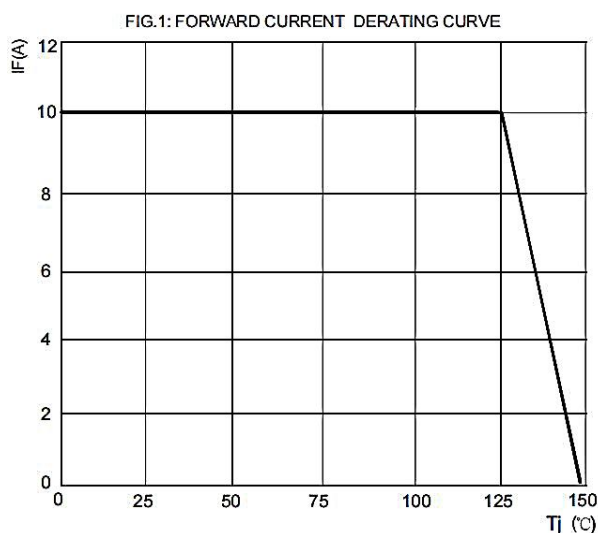





MBR10200CT

SCHOTTKY BARRIER RECTIFIER

TO - 252 Package Outline Dimensions

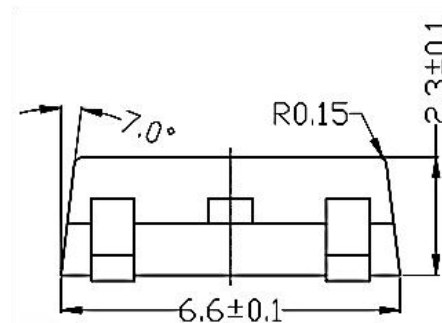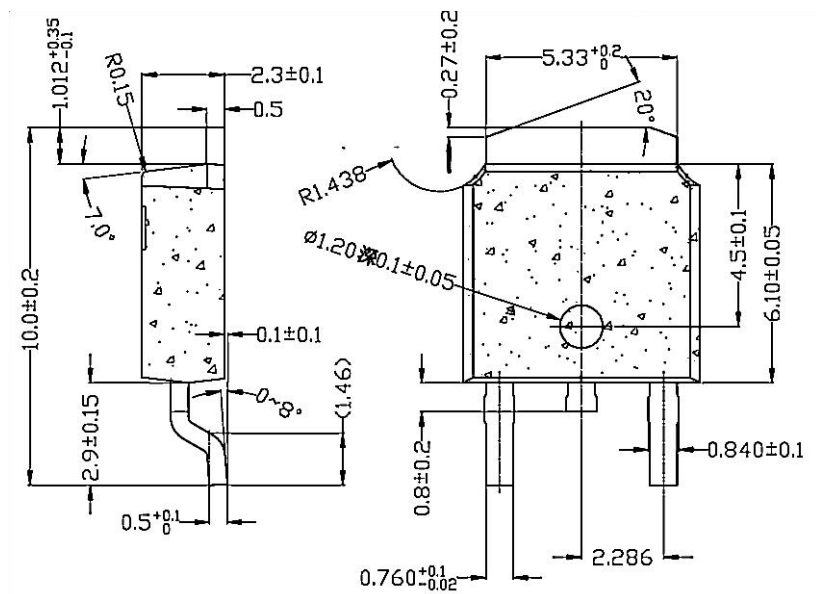

TO - 252 Packing Information



2500PC
S/reel



2 Reel/BOX



Outer box

5 Inner
Box



Inner box


Package version	Reel dimensions $\phi \times H$ (mm)	Per Reel (pcs)	Reels per box	Inner box dimensions $L \times W \times H$ (mm)	Outer box (pcs)	Outer box dimensions $L \times W \times H$ (mm)
TO-252	$\phi 330 \times 20$	2500	2	360*340*50	25000	375*375*280



MBR10200CT

SCHOTTKY BARRIER RECTIFIER

TO - 220F Package Outline Dimensions

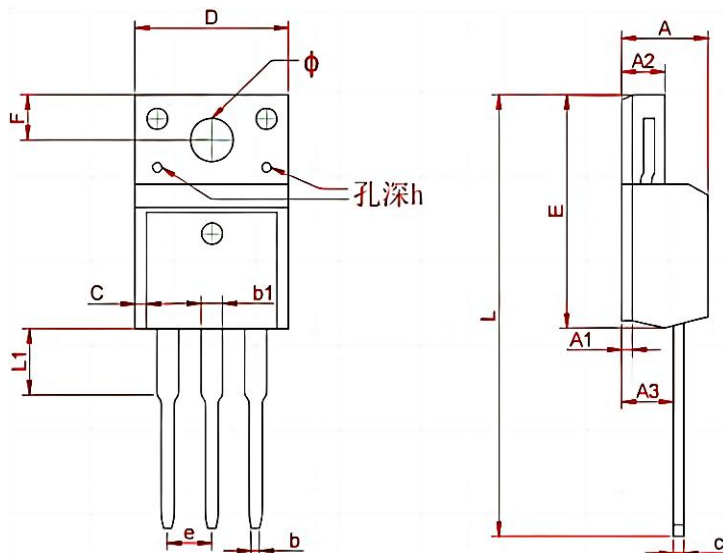

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max	Min	Max
A	4.300	4.750	0.169	0.185
A1	1.830 REF		0.072 REF	
A2	2.300	2.850	0.090	0.112
A3	2.500	2.900	0.098	0.114
b	0.400	0.420	0.016	0.016
b1	1.220	1.280	0.048	0.050
C	0.690	0.720	0.027	0.028
c	0.490	0.510	0.019	0.020
D	9.960	10.200	0.392	0.400
E	15.000	15.950	0.588	0.625
e	2.574 TYP		0.101TYP	
F	3.470 REF		0.136 REF	
y	3.200 REF		0.125 REF	
h	0.000	0.300	0.000	0.012
L	28.780	28.900	1.128	1.133
L1	2.990	3.100	0.117	0.122

TO - 220F Packing Information



50PCS



20 Tube



Outer Box

5 Inner
Box



Inner Box

Package version	Tube dimensions LxWxH (mm)	Per Tube (pcs)	Tube per box	Inner box dimensions LxWxH (mm)	PCS/ Inner box	Outer box dimensions LxWxH(mm)	PCS/ Outer box
TO-220F	530*32*7	50	20	580*155*50	1000	602*277*188	5000